


## Sospensione elettrificata Q







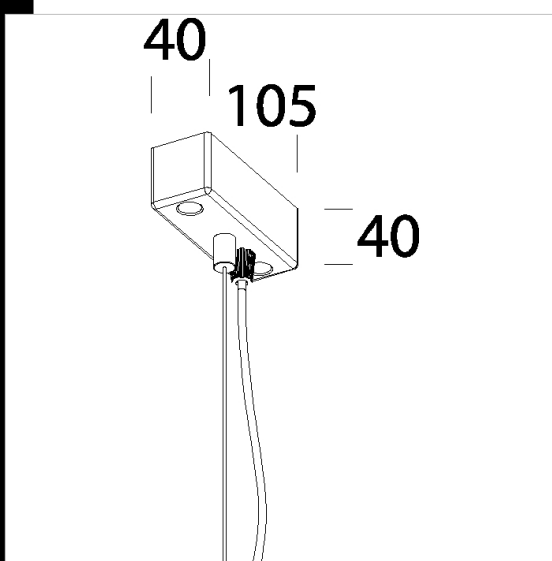
















### Download

DXF 2D  
- 3174s.dxf



Code	Kg	WTot	Colour
22003174-00	0,30	0 W	ARGENTO
22003190-00	0,31	0 W	BIANCO
22003130-00	0,30	0 W	NERO

### Prodotti

	- Omnitrack 3 accensioni		- PanelTech UGR<19 - A		- PanelTech High Performance -		- Eco Pannello luminoso
	- Slim 3 URG<19		- PanelTech UGR<19 - B		- PanelTech UGR<19 - R2		- PanelTech UGR<19 - R3
	- Eco Pannello luminoso R2		- Omnitrack PLUS - DIMM - 6 conduttori		- Sintesi System - a sospensione luce diretta/indiretta - diffondente		- Sintesi System - a sospensione con schermo UGR<19
	- Sintesi System - a sospensione luce diretta/indiretta - con schermo UGR<19		- Sintesi System - a sospensione ottica Dark - UGR<19		- Sintesi System - a sospensione luce diretta/indiretta - ottica Dark - UGR<19		- Sintesi System - a sospensione con schermo satinato - UGR<22
	- Sintesi System - a sospensione luce diretta/indiretta - con schermo satinato - UGR<22		- Sintesi System - plafone asimmetrica 25° - UGR<22		- Sintesi System - a sospensione luce diretta/indiretta - diffondente 60° - UGR<22		- Eco Pannello luminoso - CAM
	- Eco Pannello luminoso R2 - CAM		- PanelTech High Performance UGR<19 - A2 - CAM		- PanelTech High Performance UGR<19 - R2 - CAM		

The reported luminous flux is the flux emitted by the light source with a tolerance of  $\pm 10\%$  compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated

## Sospensione elettrificata Q

### Prodotti

	- Sintesi System - a sospensione - diffusore		- PanelTech High Performance - UGR<19 - R2		- PanelTech High Performance - UGR<19 - A		- Liset 2.0 - a sospensione - diretta - Dark light - UGR<19
	- Liset 2.0 - a sospensione - diretta - ottiche comfort - UGR<19		- Liset 2.0 - C+2S		- Liset 2.0 - C+H+3M - UGR<19		- Liset 2.0 - C+M+2S - UGR<19
	- Liset 2.0 - C+2M		- Liset 2.0 - C 4D		- Liset 2.0 - C 2D+2M		- Liset 2.0 - C 4M
	- Liset 2.0 HE - sospensione luce diretta - UGR<19		- Liset 2.0 HE - sospensione luce diretta - biasimmetrico 25°		- Liset 2.0 HE - sospensione luce diretta - asimmetrico 25°		- Liset 2.0 HE - sospensione luce diretta - 90°
	- Liset 2.0 TW - a sospensione - luce diretta - ottiche comfort - UGR<19		- Liset 2.0 HCL - a sospensione - luce diretta - ottiche comfort - UGR<19		- Liset 2.0 TW - a sospensione - luce diretta - diffusore in policarbonato		- Liset 2.0 HCL - a sospensione - luce diretta - diffusore in policarbonato
	- Liset 2.0 HE - sospensione luce diretta - 30°x80°						

The reported luminous flux is the flux emitted by the light source with a tolerance of  $\pm 10\%$  compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated