


Stilo a bassetta PA2

Corpo: In alluminio trattato.
 Mantenimento del flusso luminoso al 80%: 50000h (L80B20).
 Normativa: Prodotti in conformità alle norme EN 60598-1-CEI 34.21, hanno grado di protezione secondo le norme EN 60529.

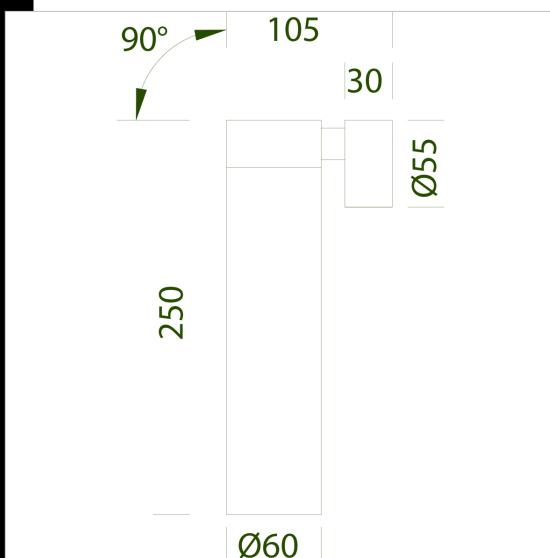

Download

DXF 2D
 - st2.dxf

Montaggi
 - STILO_LED rev4.pdf

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour
22041911-00	CLD	0,96	LED-893lm-3000K-40°-CRI 90	10 W	BIANCO
22041931-00	CLD	1,02	LED-893lm-3000K-40°-CRI 90	10 W	NERO
22041961-00	CLD	0,77	LED-893lm-3000K-40°-CRI 90	10 W	CROMATO
22041910-00	CLD-DI	0,83	LED-893lm-3000K-40°-CRI 90	10 W	BIANCO
22041930-00	CLD-DI	0,60	LED-893lm-3000K-40°-CRI 90	10 W	NERO
22041960-00	CLD-DI	0,75	LED-893lm-3000K-40°-CRI 90	10 W	CROMATO
22041911-1241	CLD CELL-D-D	0,80	LED-893lm-3000K-40°-CRI 90	10 W	BIANCO
22041931-1241	CLD CELL-D-D	0,80	LED-893lm-3000K-40°-CRI 90	10 W	NERO
22041961-1241	CLD CELL-D-D	0,80	LED-893lm-3000K-40°-CRI 90	10 W	CROMATO
22041910-1241	CLD CELL-D-D	0,80	LED-893lm-3000K-40°-CRI 90	10 W	BIANCO
22041930-1241	CLD CELL-D-D	0,80	LED-893lm-3000K-40°-CRI 90	10 W	NERO
22041960-1241	CLD CELL-D-D	0,80	LED-893lm-3000K-40°-CRI 90	10 W	CROMATO
22041911-68	CLD CELL	0,80	LED-956lm-4000K-40°-CRI 90	10 W	BIANCO
22041931-68	CLD CELL	0,80	LED-956lm-4000K-40°-CRI 90	10 W	NERO
22041961-68	CLD CELL	0,80	LED-956lm-4000K-40°-CRI 90	10 W	CROMATO
22041910-1213	CLD CELL-DI	0,80	LED-956lm-4000K-40°-CRI 90	10 W	BIANCO
22041930-1213	CLD CELL-DI	0,80	LED-956lm-4000K-40°-CRI 90	10 W	NERO
22041960-1213	CLD CELL-DI	0,80	LED-956lm-4000K-40°-CRI 90	10 W	CROMATO
22041911-6841	CLD CELL-D-D	0,80	LED-956lm-4000K-40°-CRI 90	10 W	BIANCO
22041931-6841	CLD CELL-D-D	0,80	LED-956lm-4000K-40°-CRI 90	10 W	NERO
22041961-6841	CLD CELL-D-D	0,80	LED-956lm-4000K-40°-CRI 90	10 W	CROMATO
22041910-6841	CLD CELL-D-D	0,80	LED-956lm-4000K-40°-CRI 90	10 W	BIANCO
22041930-6841	CLD CELL-D-D	0,80	LED-956lm-4000K-40°-CRI 90	10 W	NERO
22041960-6841	CLD CELL-D-D	0,80	LED-956lm-4000K-40°-CRI 90	10 W	CROMATO

The reported luminous flux is the flux emitted by the light source with a tolerance of ± 10% compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated