



Download


DXF 2D
- stilobc3.dxf

Montaggi
- STILO_LED rev4.pdf



Stilo BC - 3x - Sospensione

Corpo: in alluminio trattato.
 Mantenimento del flusso luminoso al 80%: 50000h (L80B20).
 Normative: prodotti in conformità alle vigenti norme CEI 34-21, CEI EN 60598-1, CEI EN 60598-2-1, CEI EN 60598-2-2.

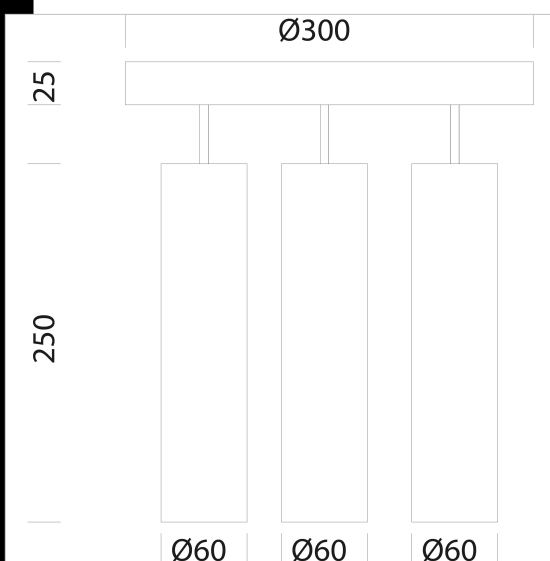

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour
22045910-00	CLD	0,60	LED3x-893lm-3000K-40°-CRI 90	36 W	BIANCO
22045930-00	CLD	0,60	LED3x-893lm-3000K-40°-CRI 90	36 W	NERO
22045960-00	CLD	3,04	LED3x-893lm-3000K-40°-CRI 90	36 W	CROMATO
22045810-00	CLD-DI	0,60	LED3x-893lm-3000K-40°-CRI 90	36 W	BIANCO
22045830-00	CLD-DI	0,60	LED3x-893lm-3000K-40°-CRI 90	36 W	NERO
22045860-00	CLD-DI	0,60	LED3x-893lm-3000K-40°-CRI 90	36 W	CROMATO
22045910-1241	CLD CELL-D-D	2,90	LED3x-893lm-3000K-40°-CRI 90	30 W	BIANCO
22045930-1241	CLD CELL-D-D	2,90	LED3x-893lm-3000K-40°-CRI 90	30 W	CROMATO
22045960-1241	CLD CELL-D-D	2,90	LED3x-893lm-3000K-40°-CRI 90	30 W	NERO
22045810-1241	CLD CELL-D-D	2,90	LED3x-893lm-3000K-40°-CRI 90	30 W	BIANCO
22045830-1241	CLD CELL-D-D	2,90	LED3x-893lm-3000K-40°-CRI 90	30 W	CROMATO
22045860-1241	CLD CELL-D-D	2,90	LED3x-893lm-3000K-40°-CRI 90	30 W	NERO
22045910-68	CLD CELL	2,90	LED3x-956lm-4000K-40°-CRI 90	30 W	BIANCO
22045930-68	CLD CELL	2,90	LED3x-956lm-4000K-40°-CRI 90	30 W	CROMATO
22045960-68	CLD CELL	2,90	LED3x-956lm-4000K-40°-CRI 90	30 W	NERO
22045810-1213	CLD CELL-DI	2,90	LED3x-956lm-4000K-40°-CRI 90	30 W	BIANCO
22045830-1213	CLD CELL-DI	2,90	LED3x-956lm-4000K-40°-CRI 90	30 W	CROMATO
22045860-1213	CLD CELL-DI	2,90	LED3x-956lm-4000K-40°-CRI 90	30 W	NERO
22045910-6841	CLD CELL-D-D	2,90	LED3x-956lm-4000K-40°-CRI 90	30 W	BIANCO
22045930-6841	CLD CELL-D-D	2,90	LED3x-956lm-4000K-40°-CRI 90	30 W	CROMATO
22045960-6841	CLD CELL-D-D	2,90	LED3x-956lm-4000K-40°-CRI 90	30 W	NERO
22045810-6841	CLD CELL-D-D	2,90	LED3x-956lm-4000K-40°-CRI 90	30 W	BIANCO
22045830-6841	CLD CELL-D-D	2,90	LED3x-956lm-4000K-40°-CRI 90	30 W	CROMATO
22045860-6841	CLD CELL-D-D	2,90	LED3x-956lm-4000K-40°-CRI 90	30 W	NERO

The reported luminous flux is the flux emitted by the light source with a tolerance of ± 10% compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated