


1487 palo da interrare - Visconti

Palo in acciaio \varnothing 102, colore argento. Con finestra d'ispezione in alluminio pressofuso (191x55mm), completo di 2 portafusibile di protezione, 2 fusibili da 16A, morsetteria asportabile a 4 poli. Predisposto con foro per ingresso cavo di alimentazione. Riduzione \varnothing 60 mm. Per la versione con base è necessario acquistare 4 tirafondi da interrare, bulloneria e tappi

Download

- DXF 2D
- 1487.dxf
- 3DS
- disano_1487_pole_7m.3ds
- disano_1487_pole_5m.3ds
- 3DM
- disano_1487_pole_7m.3dm
- disano_1487_pole_5m.3dm
- Montaggi
- 1485-1487 08-19.pdf

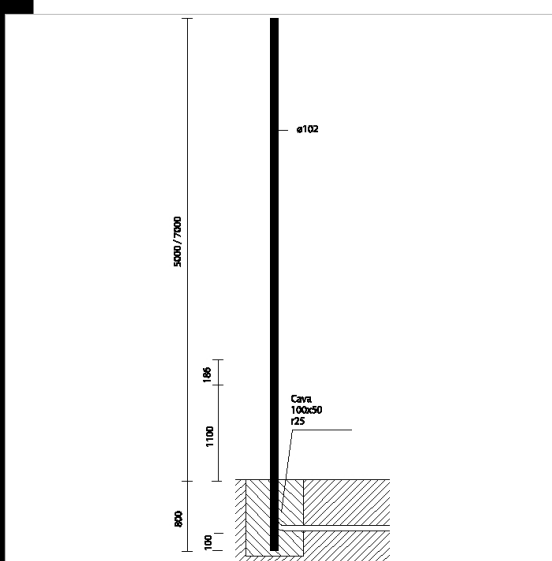

Code	Kg	Colour	Dimension	Aboveground	Underground
425064-00	42,00	GRAFITE	5800x0x0 \varnothing 102	5000	800
425065-00	60,00	GRAFITE	7800x0x0 \varnothing 102	7000	800

Accessori



Prodotti



The reported luminous flux is the flux emitted by the light source with a tolerance of \pm 10% compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated

Prodotti



- 3303 Visconti



- 3321 Pordoi 5 - LED -
Diffondente



- 3317 Pordoi - Arredo Urbano



- 3306 Visconti 7 LED - stradale



- 1293 Cilindro 4



- 3311 Visconti 12 - STWB

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated