



1435 Palo Village

Pali realizzati in lega di alluminio spazzolato 6060 fluoformato. Con finestra d' ispezione, completa di 2 portafusibili di protezione, 2 fusibili da 10A, morsetteria asportabile.


Grazie al loro profilo, risultano particolarmente adatti nelle città e nei comuni con una forte personalità.

Sezione cilindroconica con diametro di 180 o 150 mm alla base, che consente di disporre di un ampio spazio in corrispondenza del piede della piantana per l'alloggiamento dei dispositivi elettrici.

N.B.: La possibilità di accoppiare una composizione al palo è subordinata alla verifica della resistenza alla spinta del vento, nelle zone del territorio previste dal D.M.14/01/2008. Secondo le ipotesi di carico previste dalle norme EN 40-3-1.

Download

- DXF 2D
- 1435.dxf
- 3DS
- disano_1435_village.3ds
- 3DM
- disano_1435_village.3dm

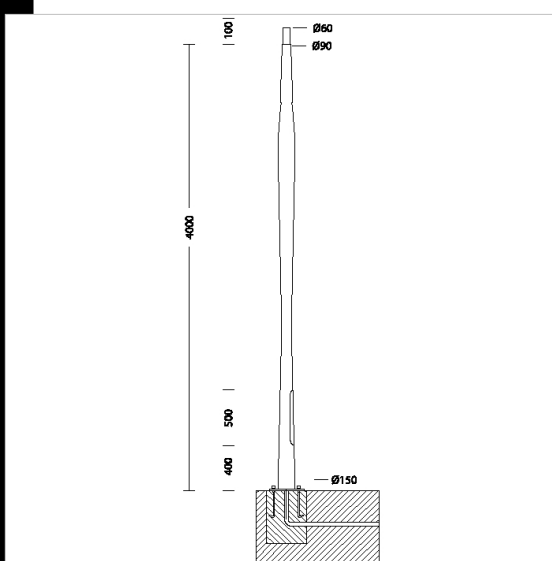

Code	Kg	Colour	Dimension	Aboveground	Underground
425250-00	22,00	GREY9007/GR AF.	0x0x4000 Ø150	4000	
425251-00	20,00	ANTRACITE	0x0x4000 Ø150	4000	

Accessori



- 298 Tirafondi City-Village

Prodotti



- 1513 Torcia LED COB



- 1766 Lanterna LED



- 3197 Montecarlo LED con forcella - piste ciclabili



- 3194 Sforza LED con forcella - diffusore con lenti ellittiche



- 1573 Volo LED diffusore



- 1593 Volo LED - piste ciclabili



- 1668 Brera - LED



- 3221 Sforza LED asimmetrico



- 3223 Sforza LED a frusta



- 3209 Lucerna Q8 LED



- 3178 Montecarlo LED con forcella - diffusore con lenti



- 3227 Sforza LED a frusta



- 1680 MiniBrera - LED - Stradale



- 1707 Torcia LED



- 1681 Brera 1 - LED - Stradale

The reported luminous flux is the flux emitted by the light source with a tolerance of ± 10% compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated