


## 1350 sferico

**GLOBO:** Sferico, in policarbonato infrangibile ed autoestinguente V2.  
**BASE:** In nylon, fibra di vetro, nero.  
**PORTALAMPADA:** In ceramica, già cablato con cavi al silicone e collegato al morsetto fissato nella base. Attacco E27.  
**MONTAGGIO:** Su palo o su braccio con attacco diam. 60 mm.  
**EQUIPAGGIAMENTO:** Bulloni in acciaio antigrippaggio con dado in acciaio inserito nel corpo della base per maggiore resistenza meccanica.

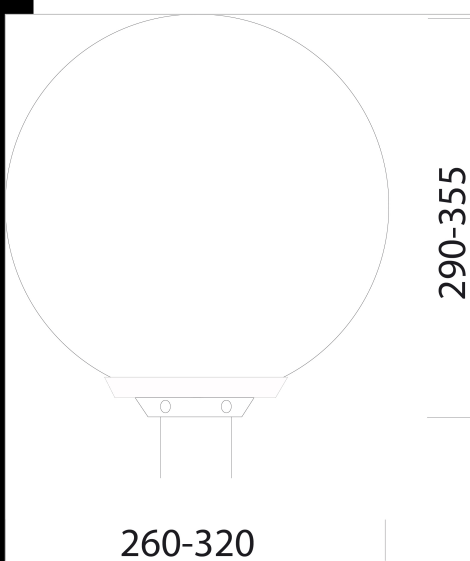

Code	Gear	Kg	Lumen-K-CRI	WTot	Base	Colour
426705-00	S	1,10	MAX 60---	0 W	E27	OPALE
426706-00	S	1,10	MAX 60---	0 W	E27	COGNAC
426700-00	S	0,80	MAX 40---	0 W	E27	TRASPARENTE
426702-00	S	0,80	MAX 40---	0 W	E27	COGNAC
426704-00	S	1,10	MAX 60---	0 W	E27	TRASPARENTE
426701-00	S	0,82	MAX 40---	0 W	E27	OPALE

### Accessori




- 1377 Braccio nylon



- 1373 braccio curvo



- 1370 Braccio



IK08

### Download

DXF 2D  
- 1350n.dxf

Montaggi  
- 1313-1320-1350-1355-1356-1357  
02-18.pdf

The reported luminous flux is the flux emitted by the light source with a tolerance of  $\pm 10\%$  compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated