


Download

- DXF 2D
- 620flag.dxf
- Montaggi
- safety flag.pdf
- BIM
- 620 - Safety Flag LED - Wall mounting - 20200528.zip
- 620 - Safety Flag LED - Suspension - 20200528.zip



620 - Safety Flag LED

Housing: In plastic material
 Reflector: In plexiglass transparent
 Version:
 Emergency run time: 60/180 minutes. When power is restored, the battery recharges automatically in 12/24h hours.
 Regulations: Produced according to applicable EN60598-1 CEI 34-21 standards, degree of protection according to EN 60529 standards.

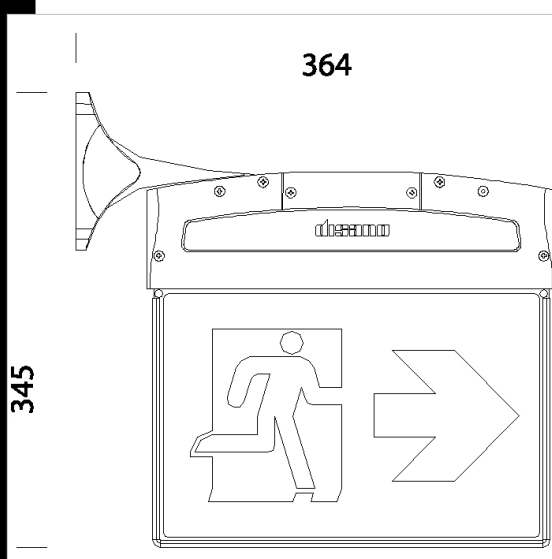

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour
112581-00	CLD CEM-L	0,71	LED--6000K-	5 W	GREY
112582-00	CLD CEM-L	0,83	LED--6000K-	5 W	GREY

Accessori



- 470 labels

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated