


741 Oblò LED

Housing: In vandal resistant and self-extinguishing polycarbonate, RAL 7035 grey, UV-stabilized, anti-yellowing.


Diffuser: In clear polycarbonate, matt inside, anti-dazzle, vandal resistant and V2 self-extinguishing, UV-stabilized, smooth outside, dustproof.

Regulations: Produced according to applicable EN60598-1 CEI 34-21 standards IP65IK08 degree of protection according to EN 60529 standards. These products can be installed on normally inflammable surfaces. Double insulation class.

Power factor 0.9 Luminous flux maintenance 70%: 50.000h (L70B50). Photobiological safety class: Exempt group.

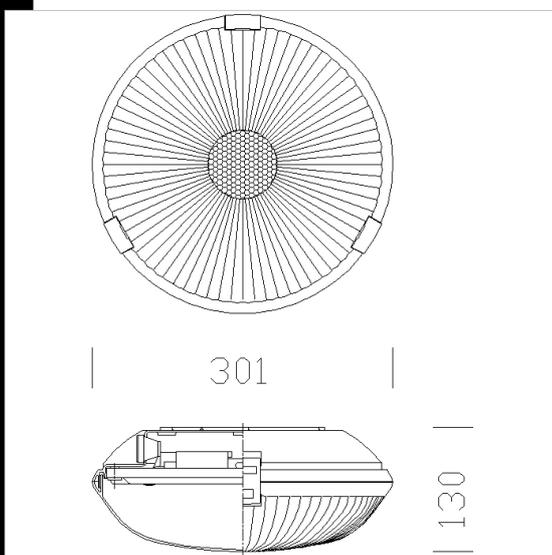

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour
112625-07	CLD CELL-E	1.88	LED-1487lm-4000K-CRI>80	17 W	GRIGIO
112625-00	CLD CELL	1.25	LED-1487-4000K-CRI>80	14 W	GRIGIO

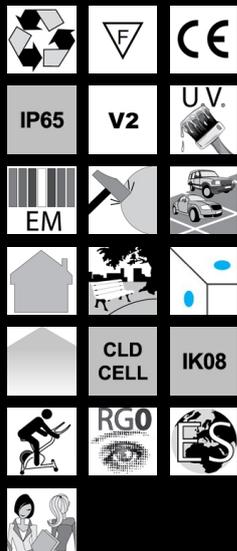

Download

DXF 2D
- d741.dxf

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated