

742 Oblò LED - with sensor

Housing: In vandal resistant and self-extinguishing polycarbonate, RAL 7035 grey, UV-stabilized, anti-yellowing.

Diffuser: In clear polycarbonate, matt inside, anti-dazzle, vandal resistant and V2 self-extinguishing, UV-stabilized, smooth outside, dustproof.


Regulations: Produced according to applicable EN60598-1 CEI 34-21 standards IP65IK08 degree of protection according to EN 60529 standards. These products can be installed on normally inflammable surfaces. Double insulation class.

Photobiological safety class: exempt group EN62471.

-19 (radar sensor)

-0024 (master)

-0096 (slave)

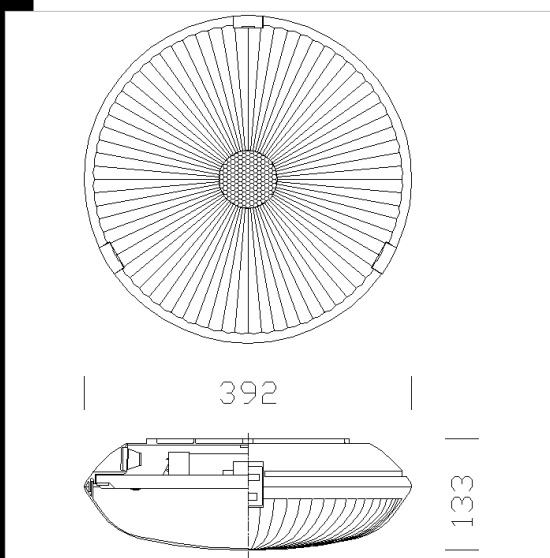

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour
112635-19	CLD CELL	1.99	LED-2261-4000K-CRI 80	20 W	GRIGIO
112635-0024	CLD CELL	1.93	LED-2261m-4000K-CRI 80	20 W	GRIGIO
112635-0096	CLD CELL	1.86	LED-2261m-4000K-CRI 80	20 W	GRIGIO



Download

DXF 2D
- d742.dxf

Montaggi
- MASTER_SLAVE.pdf
- 742.pdf

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated