


v.a. IP20 CLD IK06

v.l. IP40 DIMM DIG CLD-DD (DALI)

RGO UGR<16

LOW FLICKER

**Download**  
DXF 2D  
- 916v.dxf  
Montaggi  
- 916 ibis\_06-20.pdf  
- 916 dalli.pdf  
- 600 02-20.pdf  
BIM  
- 916 Ibis - UGR16 - 20200623.zip

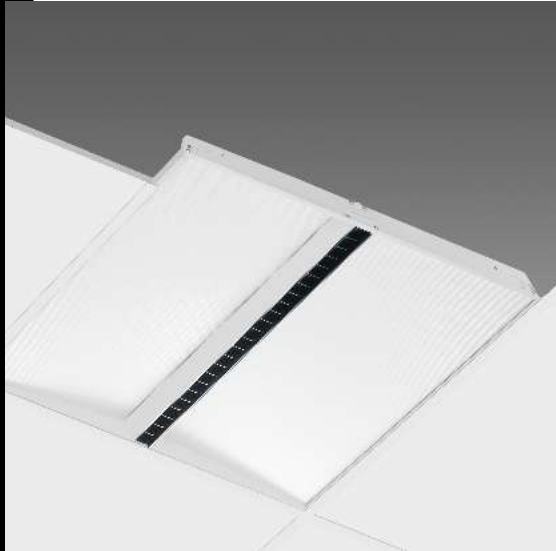


916 Ibis - UGR<16

Working and studying in the right light has a positive impact on people's mood and productivity. Ibis is the ceiling fixture made for offices and lecture rooms that guarantee maximum visual comfort in any application by emitting soft and evenly distributed light.

It fits seamlessly into new settings, thanks to its clean-cut, elegant style and replaces perfectly old lamps, guaranteeing remarkable energy savings.

Housing: pressed steel, surface mounted on T-beams. Dark light optics: honeycomb structure with PMMA lens to minimize glare. Internal slap: in PMMA. Diffuser: in prismatic plastic with high thermal transmittance. LED: Luminous flux maintenance 90%: 50.000h (L90B10). Power factor 0.9. Photobiological safety class: exempt group. UGR glare index: UGR<16 (in any situation). - EN 12464.

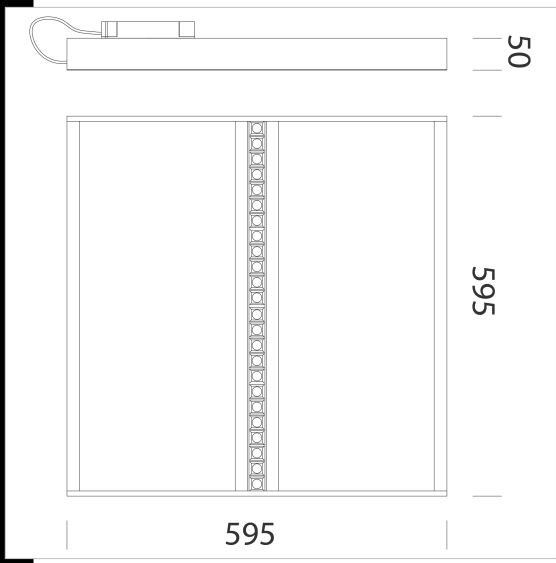

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour
114014-00	CLD	3.19	LED-3265lm-4000K-CRI 90	33 W	WHITE
114014-0041	CLD-D-D	3.31	LED-3265lm-4000K-CRI 90	33 W	WHITE
114014-39	CLD	2.77	LED-3036lm-3000K-CRI 90	33 W	WHITE
114014-3941	CLD-D-D	2.33	LED-3036lm-3000K-CRI 90	33 W	WHITE
114014-15	CLD	3.21	LED-3265lm-4000K-CRI 90	36 W	WHITE

**Accessories**



The reported luminous flux is the flux emitted by the light source with a tolerance of ± 10% compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated