


603 Disanlens UGR<19

The new Disanlens ceiling fixture is the ideal solution to ensure maximum visual comfort in places like classrooms and offices that require optimal lighting distribution.

Housing: in pre-coated and pre-galvanized sheet; ABS white thread ends with vandal-proof closure system. Diffuser: in polycarbonate with micro-prismatic finish surface to control lighting distribution. Equipment: complete with inlet cable gland and spacers to mount the fixture to the ceiling or wall.. Upon request: emergency versions only for fixtures in lengths from 1158 mm to 1440 mm. LED: Luminous flux maintenance 80%: 50.000h (L80B20). Power factor 0.9. Photobiological safety class: exempt group. UGR<19 certified.

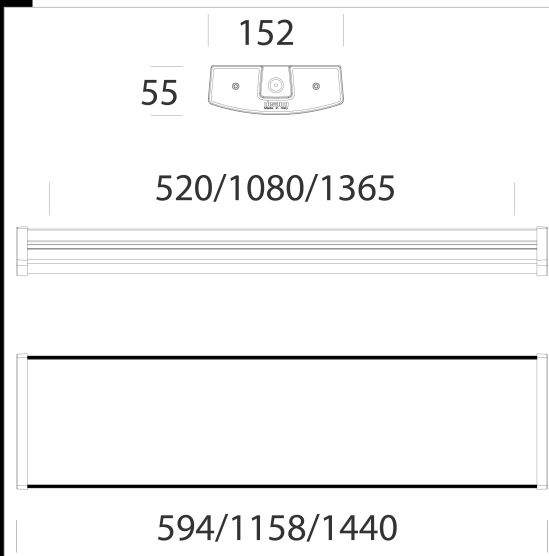

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour
115520-00	CLD	1,83	LED-1500lm-4000K-CRI 80	12 W	WHITE
115520-19	CLD	1,41	LED-1500lm-4000K-CRI 80	12 W	WHITE
115520-0041	CLD-D-D	1,41	LED-1500lm-4000K-CRI 80	12 W	WHITE
115521-00	CLD	3,27	LED-3000lm-4000K-CRI 80	23 W	WHITE
115521-19	CLD	3,37	LED-3000lm-4000K-CRI 80	23 W	WHITE
115521-0041	CELL-D-D	3,37	LED-3000lm-4000K-CRI 80	23 W	WHITE
115522-00	CLD	4,16	LED-4753lm-4000K-CRI 80	37 W	WHITE
115522-19	CLD	3,96	LED-4753lm-4000K-CRI 80	37 W	WHITE
115522-0041	CLD-D-D	4,12	LED-4753lm-4000K-CRI 80	37 W	WHITE

Accessori



- 2518 simple suspension



Download

DXF 2D
- 603.dxf

Montaggi
- disanlens 08-20.pdf

BIM
- 603 Disanlens - 20200616.zip

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated