



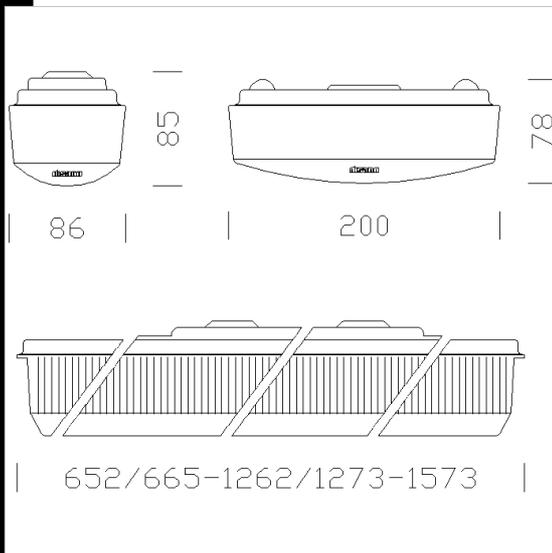

### 601 Disanlens MK - with polycarbonate diffuser

Housing: In sheet steel, pressed in one piece.  
 Reflector: In steel, white, UV-stabilised.  
 Diffuser: In clear polycarbonate, microprismatic inside, anti-dazzle, vandal resistant and V2 self-extinguishing, UV-stabilised, smooth outside, dustproof.  
 Painting: Acrylic anionic electrocoating, white, UV stabilised, upon phosphate treatment.  
 Lampholder: In polycarbonate, with phosphor bronze contacts.  
 Electric gear: 230V/50Hz power supply. Hard wire, 0.50 sqmm cross-section, PVC-HT sheath resistant up to 90°C according to CEI 20-20 standards. 2P+T terminal block with maximum allowed lead cross-section of 2.5 sqmm.  
 Regulations: Produced according to applicable EN60598-1 CEI 34 - 21 standards, IP40IK08 degree of protection according to EN 60529 standards. They have obtained the ENEC European Certificate of Conformity. This product can be installed on normally inflammable surfaces.  
 Additional gear: electronic ballast and emergency version.  
 Emergency version: In the event of a blackout, one lamp connected to the emergency circuit remains on (maintained version), thus avoiding the inconvenience usually caused by sudden power failure. Its emergency run time is 60 minutes. When power supply is restored, the battery recharges automatically.

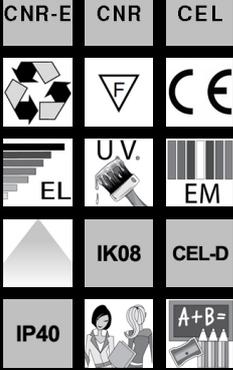

**Download**  
 DXF 2D  
 - d601\_1.dxf  
 Montaggi  
 - disanlens.pdf

Code	Gear	Kg	Lumen-K-CRI	WTot	Base	Colour
115573-08	CEL	2.83	FL 2x36-3350lm-4000K-Ra 1b	70 W	G13	WHITE
115571-12	CEL-D	1.71	FL 1x36-3350lm-4000K-Ra 1b	36 W	G13	WHITE
115572-12	CEL-D	1.80	FL 2x18-1350lm-4000K-Ra 1b	39 W	G13	WHITE
115574-08	CNR-F	3.65	FL 2x58-5200lm-4000K-Ra 1b	113 W	G13	WHITE
115574-12	CEL-D	3.73	FL 2x58-5200lm-4000K-Ra 1b	110 W	G13	WHITE
115570-08	CEL	1.70	FL 1x18-1350lm-4000K-Ra 1b	19 W	G13	WHITE
115570-12	CEL-D	1.08	FL 1x18-1350lm-4000K-Ra 1b	19 W	G13	WHITE
115573-12	CEL-D	3.08	FL 2x36-3350lm-4000K-Ra 1b	74 W	G13	WHITE
115572-08	CEL	2.10	FL 2x18-1350lm-4000K-Ra 1b	35 W	G13	WHITE
115571-08	CEL	1.69	FL 1x36-3350lm-4000K-Ra 1b	35 W	G13	WHITE
115571-09	CEL-E	2.60	FL 1x36---	40 W	G13	WHITE
115573-09	CEL-E	4.70	FL 2x36---	73 W	G13	WHITE
115574-09	CEL-E	4.20		116 W		WHITE

The reported luminous flux is the flux emitted by the light source with a tolerance of ± 10% compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated