



1901 Super - 1+1 simple version

Highly flexible in use, Super provides maximum freedom to design lighting systems of any shape and structure. With few fastenings to be used, installation procedures are extremely easy and time saving.

Housing: In hot-dip galvanised rolled steel, with rounded edges protect hands.

Reflector: In white rolled steel, anti-yellowing.

Painting: Stove pre-enamelled with white polyester resin, UV-stabilized, upon phosphate treatment.

Lampholder: In polycarbonate, with bronze contacts, quick connection, with protective collars to prevent lamp from falling. Socket G13/G5.

Electric gear: 230-240V/50-60Hz power supply, with electronic ballast. Hard wire, 0.50 sqmm cross-section and PVC-HT sheath, resistant up to 90°C according to CEI 20/20 standards. 2P+T terminal block with maximum allowed lead cross-section of 2.5 sqmm.


Standard supply: Provision for the installation of power cable trunking (auxiliary services).

Mounting: Suspension or ceiling mounting.

Regulations: Produced according to applicable EN60598-1 CEI 34-21 standards, IP40IK08 degree of protection according to EN 60529 standards if installed on complete with cover. They can be installed on normally inflammable surfaces.

Additional gear: Emergency light version.

Emergency light version: If a black-out occurs, only one lamp connected to the emergency circuit will stay on, thus avoiding the inconvenience caused by a sudden absence of all light. It has a 60-minute emergency run time. When power is restored, the battery recharges automatically.

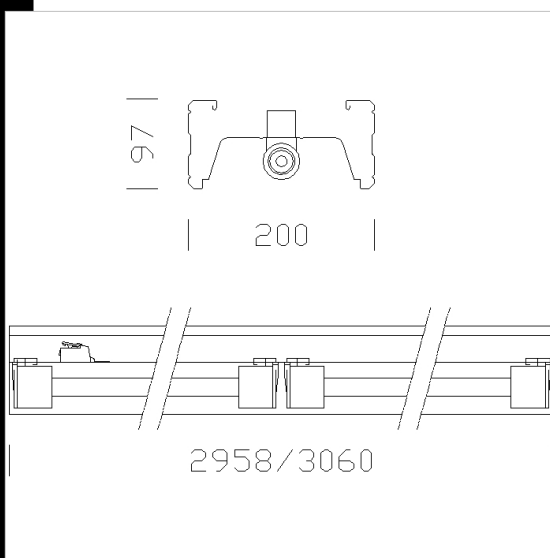

Download

DXF 2D
- 1901.dxf

Montaggi

- super5.dxf
- 1901-3_super.pdf
- super1.dxf
- super6.dxf
- super4.dxf
- super3.dxf

Code	Gear	Kg	Watt	Base	Lamps	Colour
124122-00	CEL	9,00	FL 1+1x49	G5	4100lm-4000K-Ra 1b	WHITE
124121-00	CEL	8,24	FL 1+1x80	G5	6550lm-4000K-Ra 1b	WHITE
124122-07	CEL-E	10,60	FL 1+1x49	G5	4100lm-4000K-Ra 1b	WHITE
124122-09	CEL-E	10,60	FL 1+1x58	G13	5200lm-4000K-Ra 1b	WHITE
124122-08	CEL	9,00	FL 1+1x58	G13	5200lm-4000K-Ra 1b	WHITE
124121-09	CEL-E	9,74	FL 1+1x80	G5	6550lm-4000K-Ra 1b	WHITE

Accessories



- 1914 junction bracket



- 1923 protective tube



- 1910 end cap



- 1911 cube



- 1924 Super end cap



- 1912 cube with hole



- 1916 simple suspension



- 1925 linear joint



- 1919 angle joint



- 1921 optics high-gloss