

1903 Super - 2+2 simple version

Highly flexible in use, Super provides maximum freedom to design lighting systems of any shape and structure. With few fastenings to be used, installation procedures are extremely easy and time saving.

Housing: In hot-dip galvanised rolled steel, with rounded edges protect hands.
Reflector: In white rolled steel, anti-yellowing.

Painting: Stove pre-enamelled with white polyester resin, UV-stabilized, upon phosphate treatment.

Lampholder: In polycarbonate, with bronze contacts, quick connection, with protective collars to prevent lamp from falling. Socket G13/G5.

Electric gear: 230-240V/50-60Hz power supply, with electronic ballast. Hard wire, 0.50 sqmm cross-section and PVC-HT sheath, resistant up to 90°C according to CEI 20/20 standards. 2P+T terminal block with maximum allowed lead cross-section of 2.5 sqmm.

Standard supply: Provision for the installation of power cable trunking (auxiliary services).


Mounting: Suspension or ceiling mounting.

Regulations: Produced according to applicable EN60598-1 CEI 34-21 standards, IP40IK08 degree of protection according to EN 60529 standards if installed on complete with cover. They can be installed on normally inflammable surfaces.

Additional gear: Emergency light version.

Emergency light version: If a black-out occurs, only one lamp connected to the emergency circuit will stay on, thus avoiding the inconvenience caused by a sudden absence of all light. It has a 60-minute emergency run time. When power is restored, the battery recharges automatically.

Lamps: FL2+2x80; FL2+2x58.

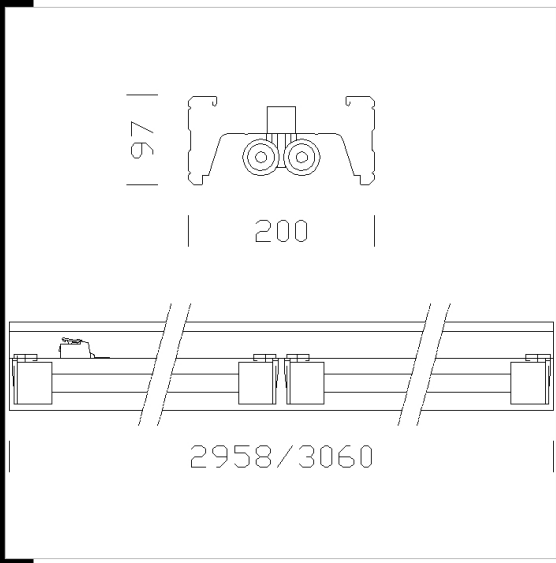

Download


DXF 2D
- 1903.dxf

Montaggi

- super6.dxf
- super4.dxf
- super3.dxf
- super5.dxf
- super1.dxf
- 1901-3_super.pdf

Code	Gear	Kg	Lumen-K-CRI	WTot	Base	Colour
124332-08	CEL	10.00	FL 2+2x49-4350lm-4000K-Ra 1b	226 W	G5	WHITE
124332-00	CEL	10.00	FL 2+2x49-4350lm-4000K-Ra 1b	210 W	G5	WHITE
124332-09	CEL-E	11.60	FL 2+2x49-4350lm-4000K-Ra 1b	229 W	G5	WHITE
124332-07	CEL-E	11.60	FL 2+2x49-4350lm-4000K-Ra 1b	214 W	G5	WHITE
124332-12	CEL-D	3.03	FL 2+2x49-4350lm-4000K-Ra 1b	210 W	G5	WHITE

Accessories

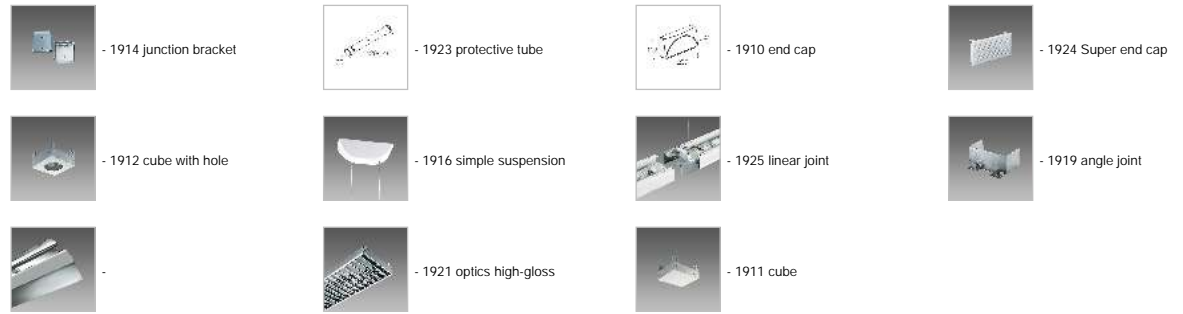

The reported luminous flux is the flux emitted by the light source with a tolerance of ± 10% compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated