



1945 Speed T5

Housing: galvanized steel stove pre-enamelling with white polyester resin, UV-stabilized, rounded edges for added protection.

Electric gear: Standard version includes double switching in the bilamp versions (2+2).


Standard supply: 3.5° protection fuse.

Emergency version: in maintained version. In the event of a "black out", one single lamp connected to the back-up circuit stays on. Run time 60 minutes.

Sketch (see chapter). Versions with 3-hour battery life available upon request.

Diffuser: the diffuser and all other symmetric or asymmetric, narrow beam or wide beam reflectors can be installed.

Regulations: Produced according to applicable EN60598-1CEI 34-21 standards, degree of protection according to EN 60529 standards.

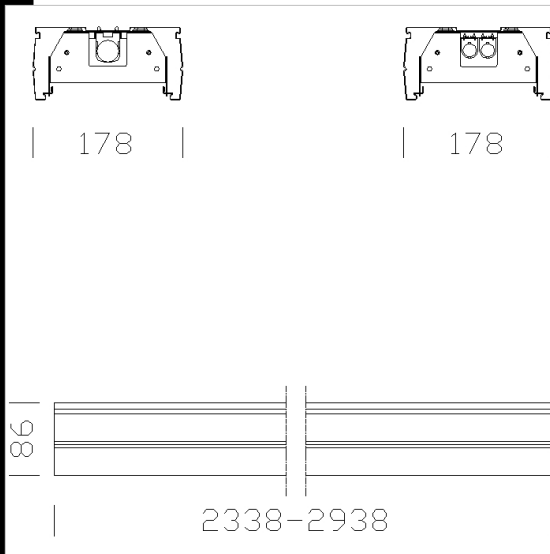


Download

DXF 2D
- 1945.dxf

Montaggi
- 442 montato.dxf
- speed.pdf
- 441 montato.dxf

Code	Gear	Kg	Lumen-K-CRI	WTot	Base	Colour
124602-07	CELLF-E	8.50	FL 2+2x54-4450lm-4000K-Ra 1b	244 W	G5	WHITE
124600-00	CELL-F	6.30	FL 1+1x54-4450lm-4000K-Ra 1b	112 W	G5	WHITE
124601-00	CELL-F	8.70	FL 1+1x49-4100lm-4000K-Ra 1b	105 W	G5	WHITE
124602-12	CELLF-D	7.90	FL 2+2x54-4450lm-4000K-Ra 1b	214 W	G5	WHITE
124601-07	CELLF-E	9.20	FL 1+1x49-4100lm-4000K-Ra 1b	109 W	G5	WHITE
124603-07	CELLF-E	10.00	FL 2+2x49-4350lm-4000K-Ra 1b	214 W	G5	WHITE
124603-12	CNR-F	10.00	FL 2+2x49-4350lm-4000K-Ra 1b	212 W	G5	WHITE
124601-12	CELLF-D	8.70	FL 1+1x49-4100lm-4000K-Ra 1b	97 W	G5	WHITE
124600-12	CELLF-D	6.30	FL 1+1x54-4450lm-4000K-Ra 1b	107 W	G5	WHITE
124603-00	CELL-F	9.46	FL 2+2x49-4350lm-4000K-Ra 1b	210 W	G5	WHITE
124600-07	CELLF-E	7.00	FL 1+1x54-4450lm-4000K-Ra 1b	116 W	G5	WHITE
124602-00	CELL-F	7.90	FL 2+2x54-4450lm-4000K-Ra 1b	240 W	G5	WHITE

Accessories

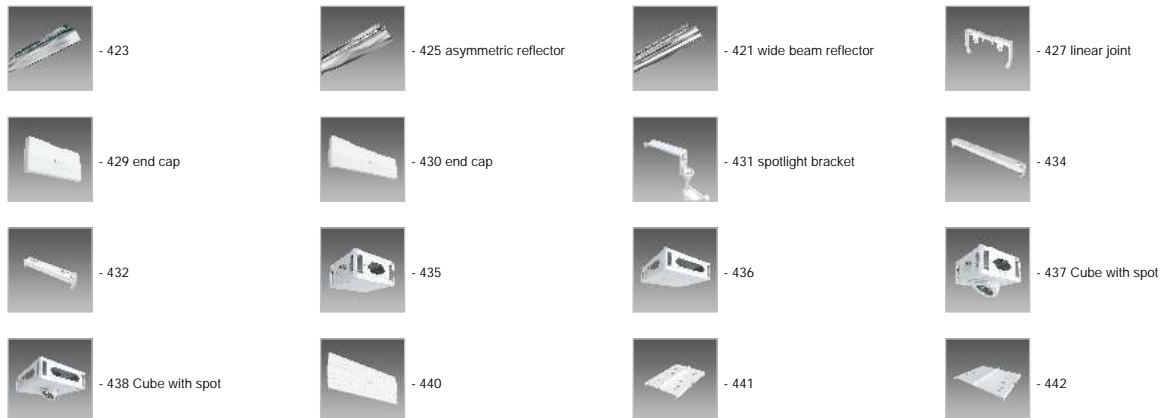

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated

Accessories



- 443



- 444



- 439



- 490



- 491



- 492



- 481 IP40 Speed



- 433 Spotlight bracket

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated