

## 2654 Evoluzione - wide beam




Housing: In pressed sheet steel with electric gear positioned at the side.  
Optics: parabolic louvers, plated aluminium, anti-dazzle and anti-iridescence.  
Painting: Spray coated with a UV-stabilised acrylic water-based paint, resistant to humidity, UV-stabilized.

Lampholder: In polycarbonate, with contacts in phosphor bronze.  
Electric gear: 230-240V/50Hz power supply. Hard wire, 0.50 sqmm cross section, and PVC-HT sheath, resistant up to 90°C, according to CEI 20-20 standards. 2P + T terminal block, facilitating creation of continuous lines, with maximum allowed lead cross section of 2.5 sqmm.

Regulations: Produced according to applicable EN60598-1 CEI 34 - 21 standards, IP40IK08 degree of protection according to EN 60529 standards. Moreover, they can be installed on normally inflammable surfaces.

The ideal ceiling system for installation at heights ranging between 4 and 8 m. In particular, for large commercial areas, and industrial and sport facilities.

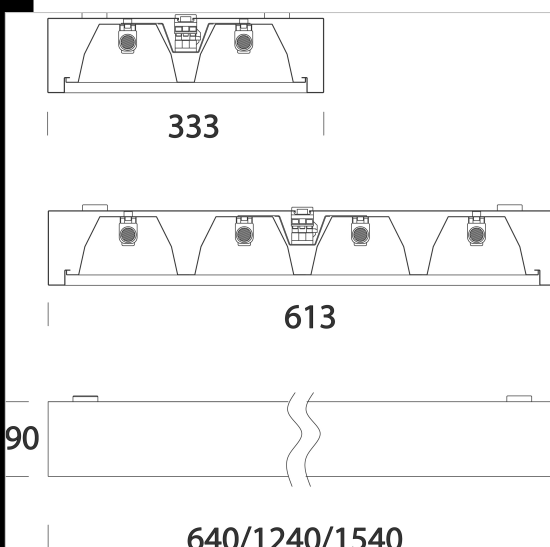

Code	Gear	Kg	Lumen-K-CRI	WTot	Base	Colour
125768-07	CELLF-E	6.04	FL 4x24-1750lm-4000K-Ra 1b	110 W	G5	WHITE
125770-00	CELL-F	8.76	FL 4x54-4450lm-4000K-Ra 1b	240 W	G5	WHITE
125773-07	CELLF-E	11.70	FL 4x80-6550lm-4000k-Ra 1b	316 W	G5	WHITE
125761-12	CELLF-D	7.36	FL 2x49-4350lm-4000K-Ra 1b	106 W	G5	WHITE
125763-12	CELLF-D	7.52	FL 2x80-6550lm-4000k-Ra 1b	158 W	G5	WHITE
125766-12	CELLF-D	7.60	FL 3x54-4450lm-4000K-Ra 1b	173 W	G5	WHITE
125761-00	CELL-F	7.16	FL 2x49-4350lm-4000K-Ra 1b	105 W	G5	WHITE
125767-07	CELLF-E	9.75	FL 3x80-6550lm-4000k-Ra 1b	246 W	G5	WHITE
125773-12	CELLF-D	10.98	FL 4x80-6550lm-4000k-Ra 1b	316 W	G5	WHITE
125762-07	CELLF-E	6.25	FL 2x54-4460lm-4000K-Ra 1b	124 W	G5	WHITE
125770-12	CELLF-D	9.80	FL 4x54-4450lm-4000K-Ra 1b	214 W	G5	WHITE
125769-12	CELLF-D	10.00	FL 4x49-4350lm-4000K-Ra 1b	210 W	G5	WHITE
125765-07	CELLF-E	9.95	FL 3x49-4350lm-4000K-Ra 1b	170 W	G5	WHITE
125762-00	CELL-F	5.65	FL 2x54-4460lm-4000K-Ra 1b	120 W	G5	WHITE
125768-12	CELLF-D	5.30	FL 4x24-1750lm-4000K-Ra 1b	106 W	G5	WHITE
125761-07	CELLF-E	7.90	FL 2x49-4350lm-4000K-Ra 1b	109 W	G5	WHITE
125765-00	CELL-F	8.25	FL 3x49-4350lm-4000K-Ra 1b	160 W	G5	WHITE
125767-12	CELLF-D	9.00	FL 3x80-6550lm-4000k-Ra 1b	242 W	G5	WHITE
125763-07	CELLF-E	8.24	FL 2x80-6550lm-4000k-Ra 1b	160 W	G5	WHITE
125765-12	CELLF-D	9.00	FL 3x49-4350lm-4000K-Ra 1b	160 W	G5	WHITE
125770-07	CELLF-E	8.96	FL 4x54-4450lm-4000K-Ra 1b	244 W	G5	WHITE
125768-00	CELL-F	5.30	FL 4x24-1750lm-4000K-Ra 1b	106 W	G5	WHITE
125773-00	CELL-F	10.70	FL 4x80-6550lm-4000k-Ra 1b	312 W	G5	WHITE
125766-00	CELL-F	7.11	FL 3x54-4450lm-4000K-Ra 1b	168 W	G5	WHITE
125767-00	CELL-F	8.25	FL 3x80-6550lm-4000k-Ra 1b	236 W	G5	WHITE
125769-07	CELLF-E	11.46	FL 4x49-4350lm-4000K-Ra 1b	214 W	G5	WHITE
125762-12	CELLF-D	6.45	FL 2x54-4460lm-4000K-Ra 1b	115 W	G5	WHITE
125763-00	CELL-F	7.16	FL 2x80-6550lm-4000k-Ra 1b	156 W	G5	WHITE
125769-00	CELL-F	8.70	FL 4x49-4350lm-4000K-Ra 1b	210 W	G5	WHITE

**Accessories**

- CELLF-E
- EL
- CELL-F
- UV
- CE
- DIMM
- IK08
- CELLFD
- DIMM DIG
- IP40
- A+B=

**Download**  
DXF 2D  
- 2654.dxf  
Montaggi  
- evoluzione.pdf  
- evoluzione fila.dxf  
- evoluzione.pdf

The reported luminous flux is the flux emitted by the light source with a tolerance of ± 10% compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated

Accessories



- 2292 connecting bracket



- 219 protective guard



- 225 eyebolt

The reported luminous flux is the flux emitted by the light source with a tolerance of  $\pm 10\%$  compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated