




2654 Evoluzione - wide beam

Housing: In pressed sheet steel with electric gear positioned at the side.
Optics: parabolic louvres, plated aluminium, anti-dazzle and anti-iridescence.
Painting: Spray coated with a UV-stabilised acrylic water-based paint, resistant to humidity, UV-stabilized.

Lampholder: In polycarbonate, with contacts in phosphor bronze.
Electric gear: 230-240V/50Hz power supply. Hard wire, 0.50 sqmm cross section, and PVC-HT sheath, resistant up to 90°C, according to CEI 20-20 standards. 2P + T terminal block, facilitating creation of continuous lines, with maximum allowed lead cross section of 2.5 sqmm.

Regulations: Produced according to applicable EN60598-1 CEI 34 - 21 standards, IP40IK08 degree of protection according to EN 60529 standards. Moreover, they can be installed on normally inflammable surfaces.

The ideal ceiling system for installation at heights ranging between 4 and 8 m. In particular, for large commercial areas, and industrial and sport facilities.

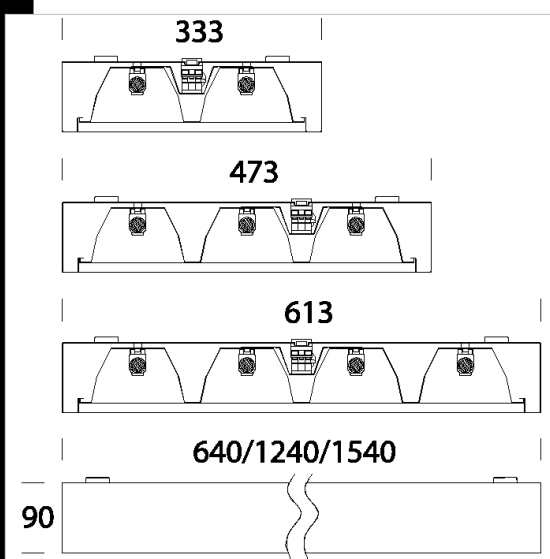

Download

DXF 2D
- 2654I.dxf

Montaggi

- evoluzione.pdf
- evoluzione fila.dxf
- evoluzione.pdf

Code	Gear	Kg	Watt	Base	Lamps	Colour
125761-12	CELLF-D	7,36	FL 2x49	G5	4350lm-4000K-Ra 1b	WHITE
125762-12	CELLF-D	6,45	FL 2x54	G5	4450lm-4000K-Ra 1b	WHITE
125763-12	CELLF-D	7,52	FL 2x80	G5	6550lm-4000K-Ra 1b	WHITE
125766-12	CELLF-D	7,60	FL 3x54	G5	4450lm-4000K-Ra 1b	WHITE
125768-12	CELLF-D	5,30	FL 4x24	G5	1750lm-4000K-Ra 1b	WHITE
125769-12	CELLF-D	10,00	FL 4x49	G5	4350lm-4000K-Ra 1b	WHITE
125770-12	CELLF-D	9,80	FL 4x54	G5	4450lm-4000K-Ra 1b	WHITE
125773-12	CELLF-D	10,98	FL 4x80	G5	6550lm-4000K-Ra 1b	WHITE
125767-12	CELLF-D	9,00	FL 3x80	G5	6550lm-4000K-Ra 1b	WHITE
125765-12	CELLF-D	9,00	FL 3x49	G5	4350lm-4000K-Ra 1b	WHITE
125761-00	CELLF-F	7,16	FL 2x49	G5	4350lm-4000K-Ra 1b	WHITE
125761-07	CELLF-E	7,76	FL 2x49	G5	4350lm-4000K-Ra 1b	WHITE
125762-00	CELLF-F	5,65	FL 2x54	G5	4450lm-4000K-Ra 1b	WHITE
125762-07	CELLF-E	6,25	FL 2x54	G5	4450lm-4000K-Ra 1b	WHITE
125763-00	CELLF-F	7,16	FL 2x80	G5	6550lm-4000K-Ra 1b	WHITE
125763-07	CELLF-E	8,24	FL 2x80	G5	6550lm-4000K-Ra 1b	WHITE
125765-00	CELLF-F	8,25	FL 3x49	G5	4350lm-4000K-Ra 1b	WHITE
125765-07	CELLF-E	9,95	FL 3x49	G5	4350lm-4000K-Ra 1b	WHITE
125766-00	CELLF-F	7,11	FL 3x54	G5	4450lm-4000K-Ra 1b	WHITE
125766-07	CELLF-E	7,87	FL 3x54	G5	4450lm-4000K-Ra 1b	WHITE
125767-00	CELLF-F	8,25	FL 3x80	G5	6550lm-4000K-Ra 1b	WHITE
125767-07	CELLF-E	9,75	FL 3x80	G5	6550lm-4000K-Ra 1b	WHITE
125768-07	CELLF-E	6,04	FL 4x24	G5	1750lm-4000K-Ra 1b	WHITE
125769-00	CELLF-F	8,70	FL 4x49	G5	4350lm-4000K-Ra 1b	WHITE
125769-07	CELLF-E	11,46	FL 4x49	G5	4350lm-4000K-Ra 1b	WHITE
125770-00	CELLF-F	8,76	FL 4x54	G5	4450lm-4000K-Ra 1b	WHITE
125770-07	CELLF-E	8,96	FL 4x54	G5	4450lm-4000K-Ra 1b	WHITE
125773-00	CELLF-F	10,70	FL 4x80	G5	6550lm-4000K-Ra 1b	WHITE
125773-07	CELLF-E	11,70	FL 4x80	G5	6550lm-4000K-Ra 1b	WHITE
125768-00	CELLF-F	5,30	FL 4x24	G5	1750lm-4000K-Ra 1b	WHITE

Accessories

2654 Evoluzione - wide beam

Accessories



- 2292 connecting bracket



- 219 protective guard



- 225 eyebolt