



2655 Evoluzione - narrow beam


Housing: In pressed sheet steel with electric gear positioned at the side.
 Optics: parabolic louvers, plated aluminium, anti-dazzle and anti-iridescence.
 Painting: Spray coated with a UV-stabilised acrylic water-based paint, resistant to humidity, UV-stabilized.
 Lampholder: In polycarbonate, with contacts in phosphor bronze.
 Electric gear: 230-240V/50Hz power supply. Hard wire, 0.50 sqmm cross section, and PVC-HT sheath, resistant up to 90°C, according to CEI 20-20 standards. 2P + T terminal block, facilitating creation of continuous lines, with maximum allowed lead cross section of 2.5 sqmm.
 Regulations: Produced according to applicable EN60598-1 CEI 34 - 21 standards, IP40IK08 degree of protection according to EN 60529 standards. Moreover, they can be installed on normally inflammable surfaces.
 The ideal ceiling system for installation at heights ranging between 4 and 8 m. In particular, for large commercial areas, and industrial and sport facilities.

Download

DXF 2D
- 2655.dxf

Montaggi

- evoluzione.pdf
- evoluzione fila.dxf
- evoluzione.pdf

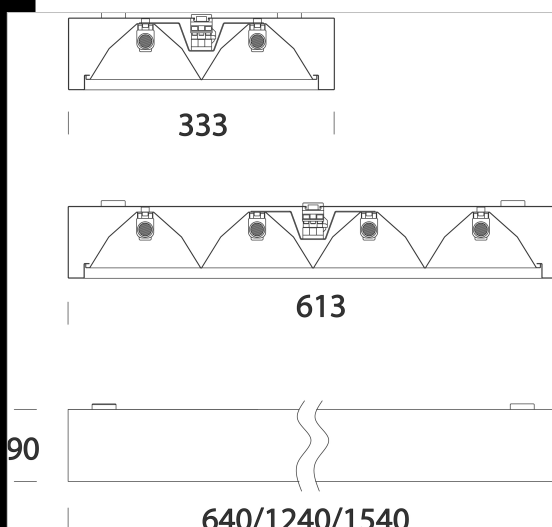

Code	Gear	Kg	Lumen-K-CRI	WTot	Base	Colour
125788-07	CELLF-E	6.04	FL 4x24-1750lm-4000K-Ra 1b	110 W	G5	WHITE
125782-12	CELLF-D	5.65	FL 2x54-4460lm-4000K-Ra 1b	118 W	G5	WHITE
125788-12	CELLF-D	5.30	FL 4x24-1750lm-4000K-Ra 1b	106 W	G5	WHITE
125790-12	CELLF-D	9.92	FL 4x54-4450lm-4000K-Ra 1b	230 W	G5	WHITE
125793-00	CNR-F	10.70	FL 4x80-6550lm-4000k-Ra 1b	312 W	G5	WHITE
125781-12	CELLF-D	7.32	FL 2x49-4350lm-4000K-Ra 1b	106 W	G5	WHITE
125789-00	CELL-F	10.70	FL 4x49-4350lm-4000K-Ra 1b	210 W	G5	WHITE
125783-00	CELL-F	7.16	FL 2x80-6550lm-4000k-Ra 1b	156 W	G5	WHITE
125788-00	CNR-F	5.30	FL 4x24-1750lm-4000K-Ra 1b	106 W	G5	WHITE
125781-07	CELLF-E	7.76	FL 2x49-4350lm-4000K-Ra 1b	109 W	G5	WHITE
125782-00	CELL-F	5.65	FL 2x54-4460lm-4000K-Ra 1b	120 W	G5	WHITE
125793-07	CELLF-E	11.42	FL 4x80-6550lm-4000k-Ra 1b	316 W	G5	WHITE
125782-07	CELLF-E	6.37	FL 2x54-4460lm-4000K-Ra 1b	124 W	G5	WHITE
125783-07	CELLF-E	8.22	FL 2x80-6550lm-4000k-Ra 1b	160 W	G5	WHITE
125789-12	CELLF-D	12.00	FL 4x49-4350lm-4000K-Ra 1b	210 W	G5	WHITE
125781-00	CELL-F	7.16	FL 2x49-4350lm-4000K-Ra 1b	105 W	G5	WHITE
125789-07	CELLF-E	11.20	FL 4x49-4350lm-4000K-Ra 1b	214 W	G5	WHITE
125790-00	CELL-F	7.76	FL 4x54-4450lm-4000K-Ra 1b	240 W	G5	WHITE
125790-07	CELLF-E	8.46	FL 4x54-4450lm-4000K-Ra 1b	244 W	G5	WHITE
125783-12	CELLF-D	6.80	FL 2x80-6550lm-4000k-Ra 1b	156 W	G5	WHITE
125793-12	CNR-F	12.00	FL 4x80-6550lm-4000k-Ra 1b	312 W	G5	WHITE
125787-12	CELLF-D	9.00	FL 3x80-6550lm-4000k-Ra 1b	242 W	G5	WHITE

Accessories



- 2292 connecting bracket



- 219 protective guard



- 225 eyebolt

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated