




2655 Evoluzione - narrow beam

Housing: In pressed sheet steel with electric gear positioned at the side.
Optics: parabolic louvers, plated aluminium, anti-dazzle and anti-iridescence.
Painting: Spray coated with a UV-stabilised acrylic water-based paint, resistant to humidity, UV-stabilized.

Lampholder: In polycarbonate, with contacts in phosphor bronze.
Electric gear: 230-240V/50Hz power supply. Hard wire, 0.50 sqmm cross section, and PVC-HT sheath, resistant up to 90°C, according to CEI 20-20 standards. 2P + T terminal block, facilitating creation of continuous lines, with maximum allowed lead cross section of 2.5 sqmm.

Regulations: Produced according to applicable EN60598-1 CEI 34 - 21 standards, IP40IK08 degree of protection according to EN 60529 standards. Moreover, they can be installed on normally inflammable surfaces.

The ideal ceiling system for installation at heights ranging between 4 and 8 m. In particular, for large commercial areas, and industrial and sport facilities.

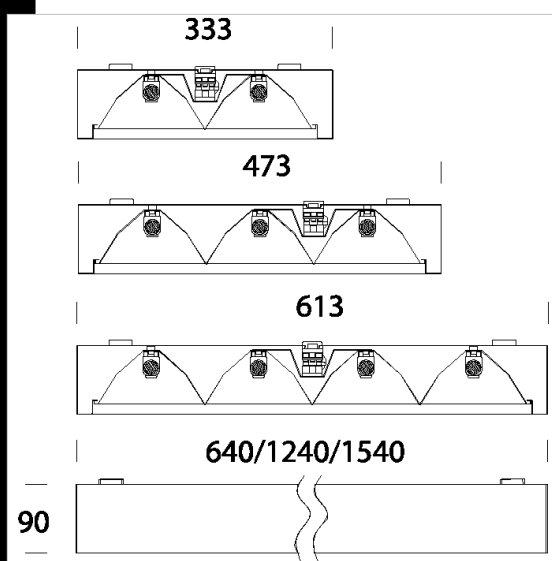

Download

DXF 2D
- 2655I.dxf

Montaggi

- evoluzione.pdf
- evoluzione fila.dxf
- evoluzione.pdf

Code	Gear	Kg	Watt	Base	Lamps	Colour
125781-12	CELLF-D	7,32	FL 2x49	G5	4350lm-4000K-Ra 1b	WHITE
125782-12	CELLF-D	5,65	FL 2x54	G5	4450lm-4000K-Ra 1b	WHITE
125785-12	CELLF-D	9,00	FL 3x49	G5	4350lm-4000K-Ra 1b	WHITE
125786-12	CELLF-D	7,60	FL 3x54	G5	4450lm-4000K-Ra 1b	WHITE
125788-12	CELLF-D	5,30	FL 4x24	G5	1750lm-4000K-Ra 1b	WHITE
125789-12	CELLF-D	12,00	FL 4x49	G5	4350lm-4000K-Ra 1b	WHITE
125790-12	CELLF-D	8,80	FL 4x54	G5	4450lm-4000K-Ra 1b	WHITE
125781-00	CELL-F	7,16	FL 2x49	G5	4350lm-4000K-Ra 1b	WHITE
125781-07	CELLF-E	7,76	FL 2x49	G5	4350lm-4000K-Ra 1b	WHITE
125782-00	CELL-F	5,65	FL 2x54	G5	4450lm-4000K-Ra 1b	WHITE
125782-07	CELLF-E	6,37	FL 2x54	G5	4450lm-4000K-Ra 1b	WHITE
125783-00	CELL-F	7,16	FL 2x80	G5	6550lm-4000K-Ra 1b	WHITE
125783-07	CELLF-E	8,22	FL 2x80	G5	6550lm-4000K-Ra 1b	WHITE
125785-00	CELL-F	8,25	FL 3x49	G5	4350lm-4000K-Ra 1b	WHITE
125785-07	CELLF-E	8,85	FL 3x49	G5	4350lm-4000K-Ra 1b	WHITE
125786-00	CELL-F	7,11	FL 3x54	G5	4450lm-4000K-Ra 1b	WHITE
125786-07	CELLF-E	7,81	FL 3x54	G5	4450lm-4000K-Ra 1b	WHITE
125787-00	CELL-F	8,25	FL 3x80	G5	6550lm-4000K-Ra 1b	WHITE
125787-07	CELLF-E	8,80	FL 3x80	G5	6550lm-4000K-Ra 1b	WHITE
125788-00	CELL-F	5,30	FL 4x24	G5	1750lm-4000K-Ra 1b	WHITE
125788-07	CELLF-E	6,04	FL 4x24	G5	1750lm-4000K-Ra 1b	WHITE
125789-00	CELL-F	10,70	FL 4x49	G5	4350lm-4000K-Ra 1b	WHITE
125789-07	CELLF-E	11,20	FL 4x49	G5	4350lm-4000K-Ra 1b	WHITE
125790-00	CELL-F	7,76	FL 4x54	G5	4450lm-4000K-Ra 1b	WHITE
125790-07	CELLF-E	8,46	FL 4x54	G5	4450lm-4000K-Ra 1b	WHITE
125793-00	CELL-F	10,70	FL 4x80	G5	6550lm-4000K-Ra 1b	WHITE
125793-07	CELLF-E	11,42	FL 4x80	G5	6550lm-4000K-Ra 1b	WHITE

Accessories

Accessories



- 2292 connecting bracket



- 219 protective guard



- 225 eyebolt