



6015 angle joint

Made of galvanized steel with a white thermoplastic material cover. For "L"-jointing of 2 tracks. To be used in combination with acc. 6621



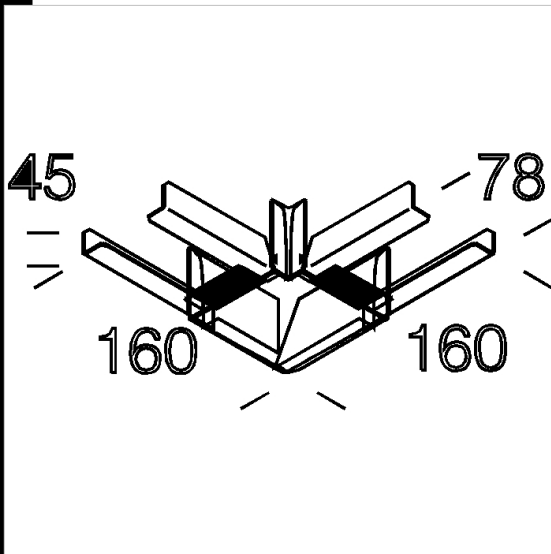

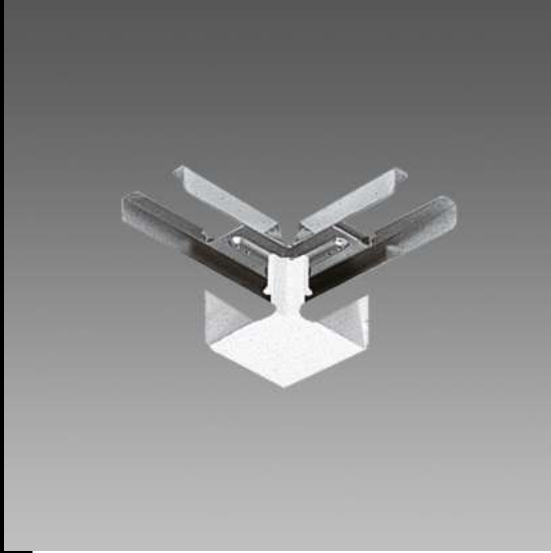


















Download

DXF 2D
- d6015.dxf

Code	Kg	WTot	Colour
132903-00	0,26	0 W	WHITE

Prodotti

	- 6000 Rapid System - power		- 6502 Rapid system - 2-lamps		- 6402 Rapid system - 1-lamp		- 6600 Techno System - 90°
	- 6601 Techno System - 25° asymmetric - CRI 90		- 6602 Techno System - 25° bi-asymmetric - CRI 90		- 6603 Techno System - 30°x80° elliptical - CRI 90		- 6604 Techno System - 60° wide-beam - CRI 90
	- 6605 Techno System - wide-beam semi-spherical diffuser - CRI 90		- 6600 Techno System - 90° symmetric - CRI 80		- 6601 Techno System - 25° asymmetric - CRI 80		- 6602 Techno System - 25° bi-asymmetric - CRI 80
	- 6603 Techno System - 30°x80° elliptical - CRI 80		- 6606 Techno System HE - UGR - CRI 80		- 6611 Techno System HE - 90° symmetric - CRI 80		- 6615 Techno System HE - 60° wide-beam - CRI 80
	- 6614 Techno System HE		- 6612 Techno System HE - 25°		- 6613 Techno System HE - 25°		- 6616 Techno System HE - wide-beam semi-spherical
	- 6617 Techno System HE - 90° Opal symmetric - CRI 80						

The reported luminous flux is the flux emitted by the light source with a tolerance of ± 10% compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated