




6512 wire

Steel wire. To be used when installation requires a longer wire than the one supplied with acc. 6510.

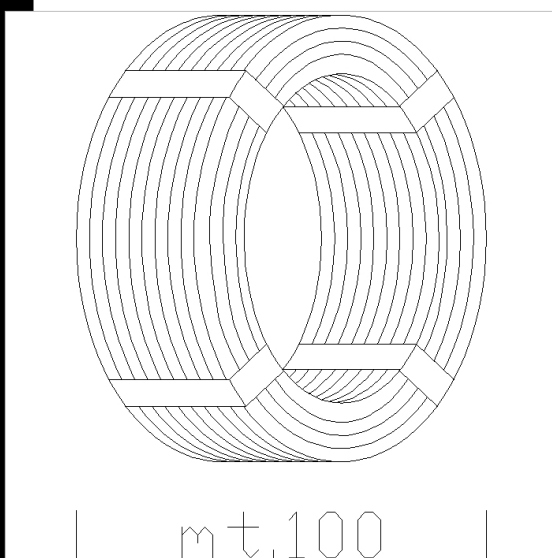

Code	Kg	WTot	Colour
132930-00	1.96	0 W	STEEL

Products



- 6102 Canale Elesystem: 7



- 6100 Canale Elesystem: 10



- 6000 Rapid System - power



- 6101 Canale Elesystem: 5



- 6600 Techno System - 90° symmetric - CRI 90



- 6601 Techno System - 25° asymmetric - CRI 90



- 6602 Techno System - 25° bi-asymmetric - CRI 90



- 6603 Techno System - 30°x80° elliptical - CRI 90



- 6604 Techno System - 60° wide-beam - CRI 90



- 6605 Techno System - wide-beam semi-spherical diffuser - CRI 90



- 6600 Techno System - 90° symmetric - CRI 80



- 6601 Techno System - 25° asymmetric - CRI 80



- 6602 Techno System - 25° bi-asymmetric - CRI 80



- 6603 Techno System - 30°x80° elliptical - CRI 80



- 6606 Techno System HE - UGR - CRI 80



- 6605 Techno System - wide-beam - with semi-spherical diffuser - Ceiling



- 6611 Techno System HE - 90°



- 6615 Techno System HE - 60°



- 6614 Techno System HE -



- 6612 Techno System HE - 25°



- 6613 Techno System HE - 25° bi-asymmetric - CRI 80



- 6616 Techno System HE - wide-beam semi-spherical diffuser - CRI 80



- 6617 Techno System HE - 90° Opal symmetric - CRI 80

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated