


6036 universal connection

In zinc-plated steel.
For installation of Hydro, Lunar, Steel, Eterna, Forma, Echo waterproof fixtures on track 6000.

Download

DXF 2D
- d6036.dxf

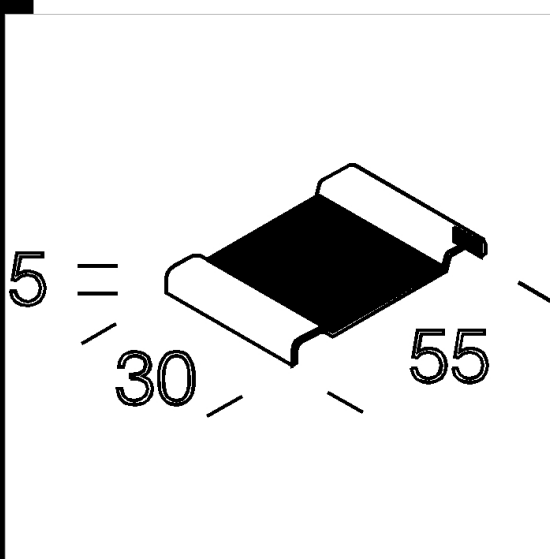

Code	Kg	WTot	Colour
132987-00	0,02	0 W	GALVANIZED

Prodotti

 - 921 Hydro ATEX protection	 - 6000 Rapid System - power	 - 923 Hydro T5 FS	 - 921 Hydro T8 EL
 - 959 Hydro - connector plug	 - 921 Hydro T5	 - 6502 Rapid system - 2-lamps version LED	 - 6402 Rapid system - 1-lamp version LED
 - 961 Hydro LED - Money Saving	 - 962 Hydro LED - Energy Saving	 - 962 Hydro LED - Energy Saving FS	 - 962 Hydro LED - Energy Saving 3000/6500K
 - 971 Ottima - High Performance	 - 960 Hydro T5 - connector plug	 - 957 Echo HE - single version LED - HE	 - 974 Ottima - Energy Saving
 - 966 Solar			

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated