


6601 Techno System - 25° asymmetric - CRI 90

With its simple, modern design Techno System blends perfectly into any space; available with a length of 1421 mm (575/1139/1703/2267/2831/3395 mm upon request) it comes in different versions. Housing: in rolled galvanized steel, pre-coated with polyester resin, UV-stabilised, with rounded edges and ABS ends. Equipment: 5-pole insulator block with phase selection (7-pole insulator block for the EMERGENCY and DALI DIMMable versions). External clamping system for track hooking. Upon request: insulator block with phase selection with up to 11 conductors. The new Techno System comes in a wide range of optics with different sets of LED sources. This allows the lamp to fit any system and obtain the best lighting output with the greatest energy efficiency. Optics: high-efficiency lens in PMMA capable of withstanding high temperatures and UV rays, including different photometric distributions. Produced according to applicable EN60598-1 CEI 34-21 standards, degree of protection according to EN 60529 standards. This lighting fixture meets the global standards of the International Food Safety (IFS), the British Retail Consortium (BRC) and the HACCP Directive regarding the safety of the lighting systems in the food industry. In any case, be sure you contact appointed designers and Disano's consultancy office to check the compatibility of materials with the food products processed and in all industrial environments where sanitizing systems are installed. LED characteristics: Power factor: 0.95. Luminous flux maintenance: (L90B10): 30000h. (L85B10): 50000h. (L75B10): 80000h. Photobiological risk class: exempt group Ambient temperature: -10°C to + 40°C

Upon request: 3000K-6500K versions and products fitting special LED sources for the FOOD sector (Red Meat, Marbled Meat, Fish, Bread &, Pastries and Produce). Upon request: version with emergency wiring with centralized power supply CLD CELL-EC (subcode -0050).

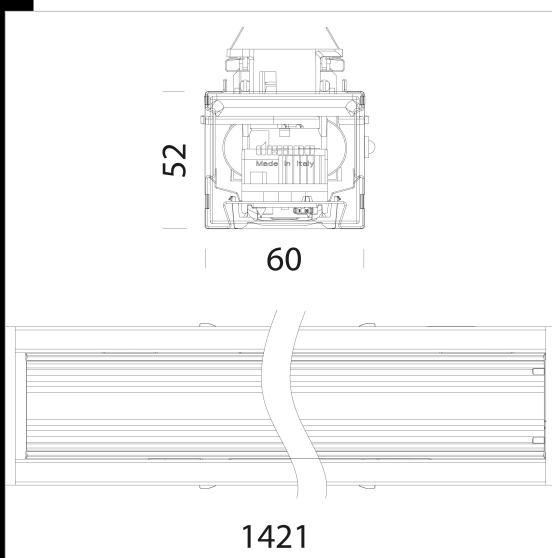

Download

DXF 2D
- technosystem.dxf

3DS
- disano_6601_TechnoSystem.3ds


3DM
- disano_6601_TechnoSystem.3dm

Montaggi
- Technosystem_apparecchi.pdf
- Technosystem_6000.pdf
- Technosystem_6001.pdf
- installation and setting layout.pdf

BIM
- 6601 Techno System - 25° asymmetric - CRI 90 - 20200611.zip

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour
133012-00	CLD	1,50	LED-3273lm-4000K-CRI 90	34 W	WHITE
133012-07	CLD-E	2,50	LED-3273lm-4000K-CRI 90	37 W	WHITE
133012-0041	CLD-D-D	1,50	LED-3273lm-4000K-CRI 90	34 W	WHITE
133013-00	CLD	1,50	LED-6547lm-4000K-CRI 90	68 W	WHITE
133013-07	CLD-E	2,50	LED-6547lm-4000K-CRI 90	71 W	WHITE
133013-0041	CLD-D-D	1,68	LED-6547lm-4000K-CRI 90	68 W	WHITE

Accessori

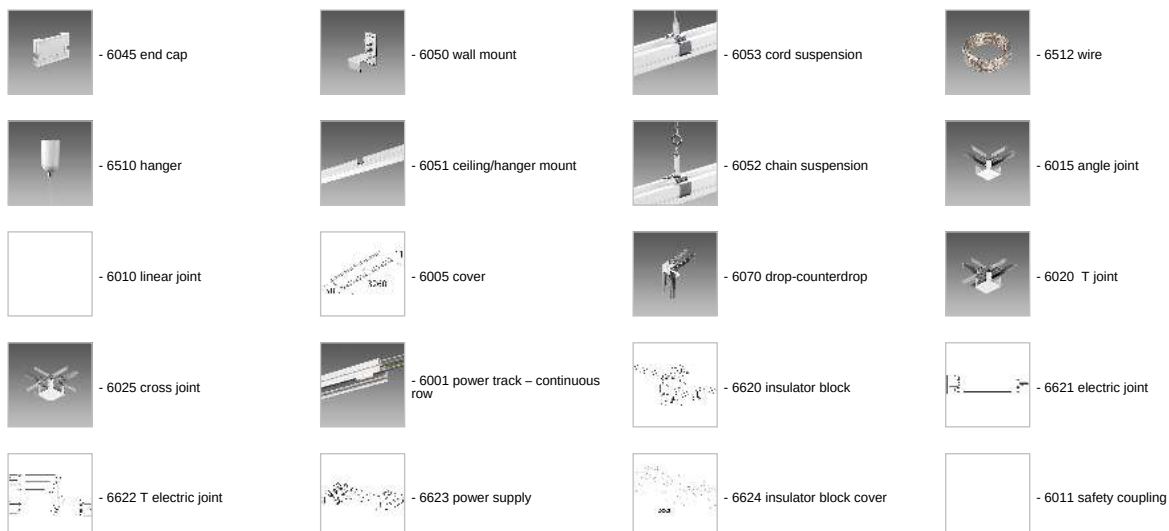

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated

6601 Techno System - 25° asymmetric - CRI 90

Accessori

- 6002 power track - non-continuous row



- 6003 power track - without connector

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated