



IP40


IK07

Download

DXF 2D
- 6610.dxf

Montaggi
- Technosystem_apparecchi.pdf
- Technosystem 6001.pdf
- Technosystem 6000.pdf

BIM
- 6610 Safety Flag S.A. - version for Techno System - 20200611.zip

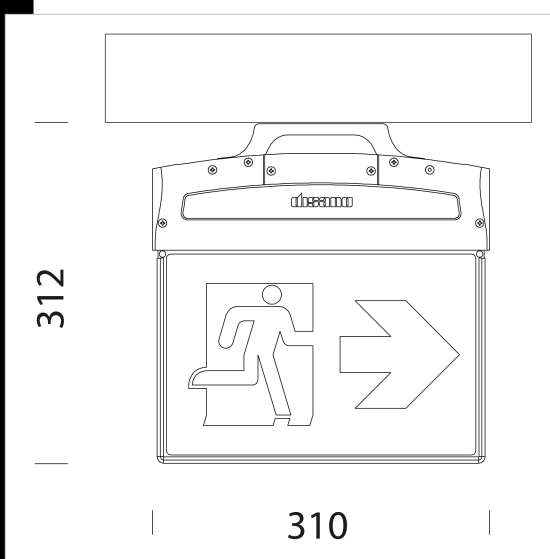

6610 Safety Flag S.A. - version for Techno System

Thanks to the dedicated support box, Techno System can fit spotlights from the Safety Flag series, emergency LED lights available in two versions: 1-hour operating range (12 hour recharge), 3-hour operating range (24 hour recharge). In this case, too, mounting is made easy thanks to the click-stop system and safety mechanical lock. This will combine general lights and safety lights into a single system.

Housing: in plastic material Reflector: in transparent plexiglass. Versions: emergency run time: 60/180 minutes. When power is restored, the battery recharges automatically in 12/24h hours.

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour
133100-00	CLD CEM-L	1,03	LED EM---	2 W	GREY
133101-00	CLD CEM-L	0,71	LED EM--	2 W	GREY

Accessori



- 470 labels

The reported luminous flux is the flux emitted by the light source with a tolerance of ± 10% compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated