


754 Heron - UGR<19

Housing and frame: injection moulded in white polycarbonate, shatterproof and self-extinguishing. Diffuser: extruded in opal engineering plastic with high thermal transmittance. Wiring: rapid wiring connection, the fixture does not need to be opened. Standard 1-10V dimmer, dimmable from 10% to 100%. LED: Power factor: 0.96. Luminous flux maintenance 80% 50.000h (L80B20). Photobiological safety class: exempt group.
LED 31W - 3700lm - 4000K - CRI 93 - UGR<19

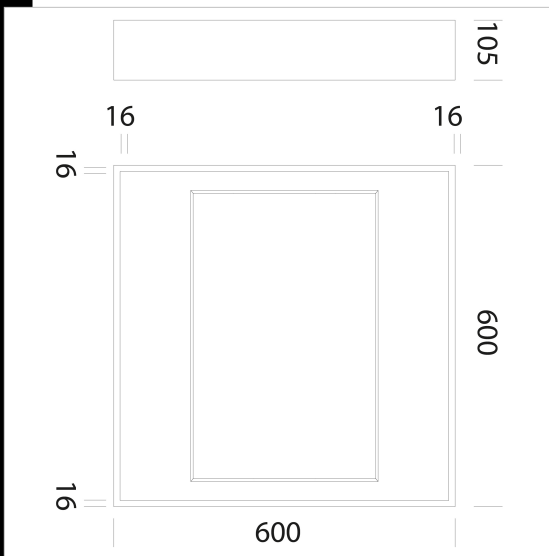

Code	Gear	Kg	Watt	Base	Lamps	Colour
140207-00	CLD CELL-D	6,38	LED white 31W		3700lm-4000K-CRI 93	WHITE

- IK06
- IP43
- A+B=
- DIMM
- LOW FLICKER
- UGR<19
- Colour quality
- RG0
- CE
- U.V.
- CLD CELL-D

Download
DXF 2D
- 754.dxf
Montaggi
- 754.pdf