




773 Comfort LED - UGR<19

Housing: in steel sheet. Dark light louvre: double parabolic louvres, in high-gloss 99.99 aluminium, anti-glare and anti-iridescence, very low luminance, PVD treatment to improve luminous efficiency. Coating: acrylic anionic electrocoating, white, UV-stabilized. Equipment: Snap fastening optics, which remain attached by safety cords. LED: Power factor 0.9 Luminous flux maintenance 70%: 40.000h (L70B50). Photobiological safety class: Exempt group.

- 141070-00 1230mm - UGR<19
- 141071-00 1530mm - UGR<19
- 141072-00 630mm - UGR<19

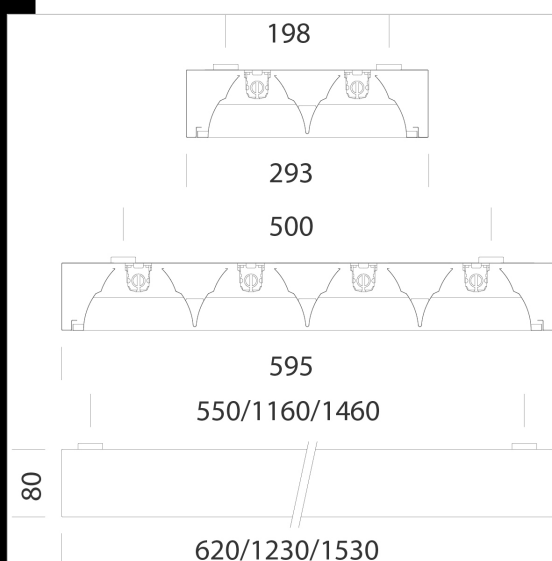

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour
141070-00	CLD-F	4,37	LED-2479lm-4000K-CRI 80	32 W	WHITE
141071-00	CLD-F	5,31	LED-3098lm-4000K-CRI 80	40 W	WHITE
141072-00	CLD-F	4,11	LED-2479lm-4000K-CRI 80	32 W	WHITE

Download

DXF 2D
- 773s.dxf

The reported luminous flux is the flux emitted by the light source with a tolerance of ± 10% compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated