


777 Comfort T8 - matt scored



Housing: In sheet steel.
 Optics: Matt louvre.
 Painting: with polyester powder, UV-stabilized.
 Lampholder: In polycarbonate, with contacts in phosphor bronze. Socket G13.
 Electric gear: 230V/50Hz power supply. Hard wire, 0.50 sq mm cross section and PVC-HT sheath resistant up to 90°, according to CEI 20-20 standards.
 2P+T terminal block with maximum allowed lead cross section of 2.5 sq mm.
 Standard supply: Snap fastening optics, which remain attached by safety cords.
 Mounting: Ceiling or suspension.
 Regulations: Produced according to applicable EN60598-1 CEI 34 - 21 standards, IP20IK07 degree of protection according to EN 60529 standards. They have obtained the ENEC European Certificate of Conformity. These products can be installed on normally inflammable surfaces.
 Emergency light version: in maintained version. In the event of a "black out", one single lamp connected to the back-up circuit stays on. Run time 60 minutes. Sketch (see chapter).
 Versions with 3-hour battery life upon request.

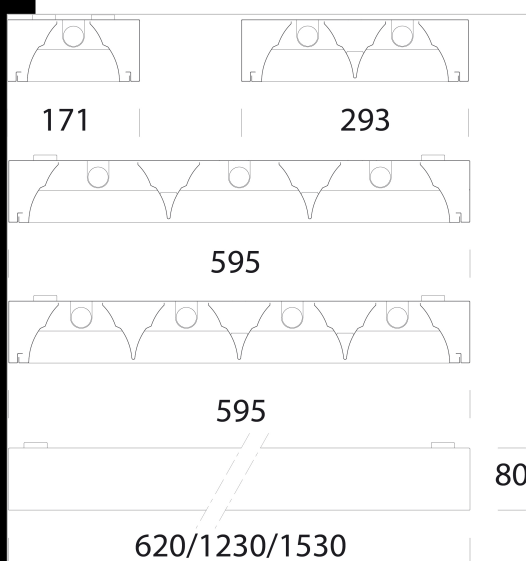

Code	Gear	Kg	Lumen-K-CRI	WTot	Base	Colour
141207-08	CEL	3,94	FL 4x18-1350lm-4000K-Ra 1b	73 W	G13	WHITE
141204-08	CEL	4,25	FL 2x36-3350lm-4000K-Ra 1b	70 W	G13	WHITE
141207-09	CEL-E	4,50	FL 4x18-1350lm-4000K-Ra 1b	76 W	G13	WHITE
141204-09	CEL-E	4,60	FL 2x36-3350lm-4000K-Ra 1b	73 W	G13	WHITE
141204-12	CEL-D	5,17	FL 2x36---	74 W	G13	WHITE
141207-12	CEL-D	4,10	FL 4x18-1350lm-4000K-Ra 1b	76 W	G13	WHITE

Accessori



- 2512 wire



- 2518 simple suspension



Download

DXF 2D
 - 773.dxf
 Montaggi
 - 77x_comfort_2008.pdf

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated