



Download

DXF 2D
- 773 dvMontaggi
- 77x comfort 2008 pdf

777 Comfort T8 - matt scored

Housing: In sheet steel.

Optics: Matt Iouyre.

Painting: with polyester powder, UV-stabilized.

Lampholder: In polycarbonate, with contacts in phosphor bronze. Socket G13
Electric gear: 230V/50Hz power supply. Hard wire, 0.50 sq mm cross section
and PVC-HT sheath resistant up to 90°, according to CEI 20-20 standards.
2P+T terminal block with maximum allowed lead cross section of 2.5 sq mm


Standard supply: Snap fastening optics, which remain attached by safety cords.

Mounting: Ceiling or suspension.

Regulations: Produced according to applicable EN60598-1 CEI 34 - 21 standards, IP20IK07 degree of protection according to EN 60529 standards. They have obtained the ENEC European Certificate of Conformity. These products can be installed on normally inflammable surfaces.

Emergency light version: in maintained version. In the event of a "black out", one single lamp connected to the back-up circuit stays on. Run time 60 minutes. Sketch (see chapter).

Versions with 3-hour battery life upon request.

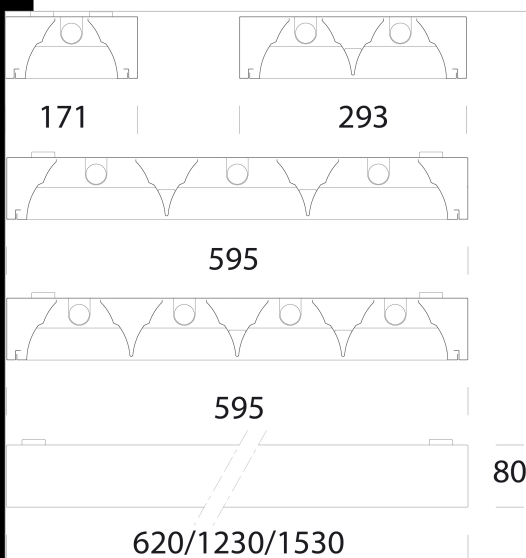

Code	Gear	Kg	Lumen-K-CRI	WTot	Base	Colour
141201-09	CEL-E	3.90	FL 1x36-3350lm-4000K-Ra 1b	40 W	G13	WHITE
141203-08	CEL	2.59	FL 2x18-1350lm-4000K-Ra 1b	38 W	G13	WHITE
141205-08	CEL	5.11	FL 2x58-5200lm-4000K-Ra 1b	113 W	G13	WHITE
141206-08	CEL	6.50	FL 3x36-3350lm-4000K-Ra 1b	108 W	G13	WHITE
141207-08	CEL	3.94	FL 4x18-1350lm-4000K-Ra 1b	73 W	G13	WHITE
141208-08	CEL	7.38	FL 4x36-3350lm-4000K-Ra 1b	146 W	G13	WHITE
141206-09	CEL-E	7.10	FL 3x36-3350lm-4000K-Ra 1b	110 W	G13	WHITE
141202-09	CEL-E	4.30	FL 1x58-5200lm-4000K-Ra 1b	59 W	G13	WHITE
141202-08	CEL	3.72	FL 1x58-5200lm-4000K-Ra 1b	56 W	G13	WHITE
141204-08	CEL	4.25	FL 2x36-3350lm-4000K-Ra 1b	70 W	G13	WHITE
141205-09	CEL-E	5.75	FL 2x58-5200lm-4000K-Ra 1b	116 W	G13	WHITE
141207-09	CEL-E	4.50	FL 4x18-1350lm-4000K-Ra 1b	76 W	G13	WHITE
141201-08	CEL	3.43	FL 1x36-3350lm-4000K-Ra 1b	37 W	G13	WHITE
141204-09	CEL-E	4.60	FL 2x36-3350lm-4000K-Ra 1b	73 W	G13	WHITE
141208-09	CEL-E	8.00	FL 4x36-3350lm-4000K-Ra 1b	150 W	G13	WHITE
141201-12	CEL-D	3.03	FL 1x36---	36 W	G13	WHITE
141202-12	CEL-D	3.64	FL 1x58---	55 W	G13	WHITE
141204-12	CEL-D	5.17	FL 2x36---	74 W	G13	WHITE
141205-12	CEL-D	5.21	FL 2x58---	110 W	G13	GREY
141206-12	CEL-D	6.50	FL 3x36-3350lm-4000K-Ra 1b	129 W	G13	WHITE
141207-12	CEL-D	4.10	FL 4x18-1350lm-4000K-Ra 1b	76 W	G13	WHITE
141208-12	CEL-D	7.38	FL 4x36-3350lm-4000K-Ra 1b	172 W	G13	WHITE

Accessories



- 2512 wire



- 2518 simple suspension

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated