


774 Comfort T8 - high-gloss 99.85



Housing: In sheet steel.
Optics: Dark light double parabolic louvres, in high-gloss plated aluminium 99.85. Anti-dazzle and anti-iridescence, very low luminance. PVD treatment to increase light efficiency.
Painting: with polyester powder, UV-stabilized.
Lampholder: In polycarbonate, with contacts in phosphor bronze. Socket G13.
Electric gear: 230V/50Hz power supply. Hard wire, 0.50 sq mm cross section and PVC-HT sheath resistant up to 90°, according to CEI 20-20 standards. 2P+T terminal block with maximum allowed lead cross section of 2.5 sq mm.
Equipment: 6.3A protection fuse
Standard supply: Snap fastening optics, which remain attached by safety cords.
Mounting: Ceiling or suspension.
Regulations: Produced according to applicable EN60598-1 CEI 34 - 21 standards, IP20IK07 degree of protection according to EN 60529 standards. They have obtained the ENEC European Certificate of Conformity. These products can be installed on normally inflammable surfaces.
Emergency light version: in maintained version. In the event of a "black out", one single lamp connected to the back-up circuit stays on. Run time 60 minutes. Sketch (see chapter).
Versions with 3-hour battery life upon request.

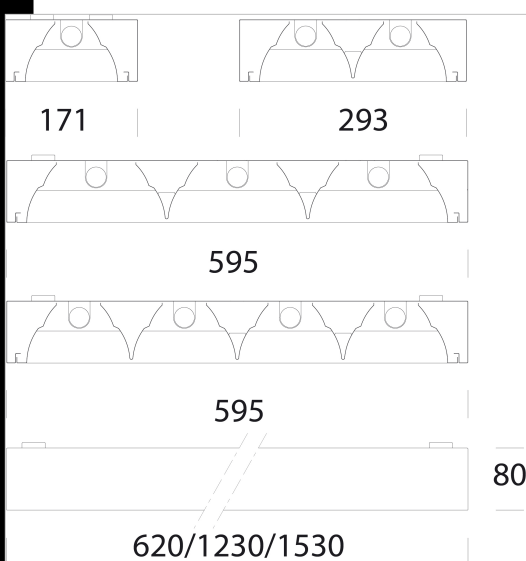

Code	Gear	Kg	Lumen-K-CRI	WTot	Base	Colour
141306-0041	CELF-D-D	6.50	FL 3x36-3350lm-4000K-Ra 1b	129 W	G13	WHITE
141305-09	CELF-E	5.70	FL 2x58-5200lm-4000K-Ra 1b	116 W	G13	WHITE
141305-08	CEL-F	5.15	FL 2x58-5200lm-4000K-Ra 1b	113 W	G13	WHITE
141307-08	CEL-F	4.10	FL 4x18-1350lm-4000K-Ra 1b	73 W	G13	WHITE
141303-08	CEL-F	2.60	FL 2x18-1350lm-4000K-Ra 1b	38 W	G13	WHITE
141306-08	CEL-F	6.50	FL 3x36-3350lm-4000K-Ra 1b	108 W	G13	WHITE
141308-08	CEL-F	6.50	FL 4x36-3350lm-4000K-Ra 1b	146 W	G13	WHITE
141302-09	CELF-E	4.34	FL 1x58-5200lm-4000K-Ra 1b	59 W	G13	WHITE
141306-09	CELF-E	7.82	FL 3x36-3350lm-4000K-Ra 1b	110 W	G13	WHITE
141301-08	CNR-F	3.03	FL 1x36-3350lm-4000K-Ra 1b	37 W	G13	WHITE
141304-12	CELF-D	4.49	FL 2x36-3350lm-4000K-Ra 1b	74 W	G13	WHITE
141306-12	CELF-D	7.46	FL 3x36-3350lm-4000K-Ra 1b	110 W	G13	WHITE
141307-12	CELF-D	4.18	FL 4x18-1350lm-4000K-Ra 1b	76 W	G13	WHITE
141308-12	CELF-D	7.70	FL 4x36-3350lm-4000K-Ra 1b	148 W	G13	WHITE
141308-0041	CELF-D-D	8.20	FL 4x36-3350lm-4000K-Ra 1b	141 W	G13	WHITE
141304-09	CELF-E	4.70	FL 2x36-3350lm-4000K-Ra 1b	73 W	G13	WHITE
141304-0041	CELF-D-D	4.41	FL 2x36-3350lm-4000K-Ra 1b	70 W	G13	WHITE
141307-0041	CELF-D-D	4.00	FL 4x18-1350lm-4000K-Ra 1b	79 W	G13	WHITE
141302-12	CELF-D	3.76	FL 1x58-5200lm-4000K-Ra 1b	55 W	G13	WHITE
141305-12	CELF-D	5.25	FL 2x58-5200lm-4000K-Ra 1b	108 W	G13	WHITE
141302-08	CEL-F	3.70	FL 1x58-5200lm-4000K-Ra 1b	56 W	G13	WHITE
141304-08	CEL-F	4.29	FL 2x36-3350lm-4000K-Ra 1b	70 W	G13	WHITE
141308-09	CELF-E	7.50	FL 4x36-3350lm-4000K-Ra 1b	149 W	G13	WHITE
141307-09	CELF-E	4.70	FL 4x18-1350lm-4000K-Ra 1b	76 W	G13	WHITE
141305-0041	CELF-D-D	5.27	FL 2x58-5200lm-4000K-Ra 1b	108 W	G13	WHITE
141301-0041	CELF-D-D	3.15	FL 1x36-3350lm-4000K-Ra 1b	35 W	G13	WHITE
141301-09	CELF-E	3.40	FL 1x36-3350lm-4000K-Ra 1b	40 W	G13	WHITE
141302-0041	CELF-D-D	3.70	FL 1x58-5200lm-4000K-Ra 1b	67 W	G13	WHITE
141301-12	CELF-D	3.03	FL 1x36-3350lm-4000K-Ra 1b	36 W	G13	WHITE

Accessories



Download
 DXF 2D
 - 773.dxf
 Montaggi
 - 77x_comfort_2008.pdf

The reported luminous flux is the flux emitted by the light source with a tolerance of ± 10% compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated

Accessories



- 2512 wire



- 2518 simple suspension

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated