

776 Comfort T8 - matt



Housing: In sheet steel.
Optics: Dark light double parabolic louvres, in matt aluminium. Anti-dazzle and anti-iridescence, very low luminance. PVD treatment to increase light efficiency.

Painting: with polyester powder, UV-stabilized.

Lampholder: In polycarbonate, with contacts in phosphor bronze. Socket G13.
Electric gear: 230V/50Hz power supply. Hard wire, 0.50 sq mm cross section and PVC-HT sheath resistant up to 90°, according to CEI 20-20 standards.
2P+T terminal block with maximum allowed lead cross section of 2.5 sq mm.

Equipment: 6.3A protection fuse


Standard supply: Snap fastening optics, which remain attached by safety cords.

Mounting: Ceiling or suspension.

Regulations: Produced according to applicable EN60598-1 CEI 34 - 21 standards, IP20IK07 degree of protection according to EN 60529 standards. They have obtained the ENEC European Certificate of Conformity. These products can be installed on normally inflammable surfaces.

Emergency light version: in maintained version. In the event of a "black out", one single lamp connected to the back-up circuit stays on. Run time 60 minutes. Sketch (see chapter).

Versions with 3-hour battery life upon request.

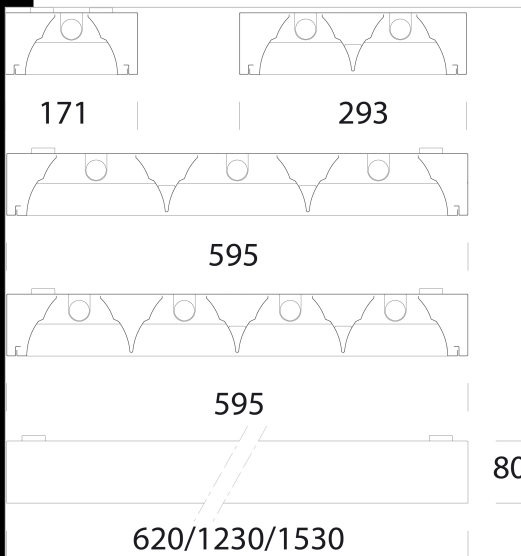

Code	Gear	Kg	Lumen-K-CRI	WTot	Base	Colour
141407-09	CELF-E	4.52	FL 4x18-1350lm-4000K-Ra 1b	76 W	G13	WHITE
141408-12	CELF-D	9.50	FL 4x36-3350lm-4000K-Ra 1b	172 W	G13	WHITE
141404-08	CEL-F	4.00	FL 2x36-3350lm-4000K-Ra 1b	70 W	G13	WHITE
141401-09	CELF-E	3.71	FL 1x36-3350lm-4000K-Ra 1b	40 W	G13	WHITE
141402-09	CELF-E	4.32	FL 1x58-5200lm-4000K-Ra 1b	59 W	G13	WHITE
141405-0041	CELF-D-D	5.29	FL 2x58-5200lm-4000K-Ra 1b	108 W	G13	WHITE
141408-0041	CELF-D-D	8.20	FL 4x36-3350lm-4000K-Ra 1b	141 W	G13	WHITE
141401-0041	CELF-D-D	3.47	FL 1x36-3350lm-4000K-Ra 1b	35 W	G13	WHITE
141405-09	CELF-E	5.20	FL 2x58-5200lm-4000K-Ra 1b	116 W	G13	WHITE
141401-12	CELF-D	3.17	FL 1x36-3350lm-4000K-Ra 1b	36 W	G13	WHITE
141404-0041	CELF-D-D	4.47	FL 2x36-3350lm-4000K-Ra 1b	76 W	G13	WHITE
141406-08	CEL-F	6.50	FL 3x36-3350lm-4000K-Ra 1b	108 W	G13	WHITE
141406-12	CELF-D	6.50	FL 3x36-3350lm-4000K-Ra 1b	110 W	G13	WHITE
141405-12	CELF-D	5.27	FL 2x58-5200lm-4000K-Ra 1b	108 W	G13	WHITE
141406-0041	CELF-D-D	6.50	FL 3x36-3350lm-4000K-Ra 1b	129 W	G13	WHITE
141402-12	CELF-D	3.70	FL 1x58-5200lm-4000K-Ra 1b	55 W	G13	WHITE
141404-12	CELF-D	4.49	FL 2x36-3350lm-4000K-Ra 1b	74 W	G13	WHITE
141404-09	CELF-E	4.50	FL 2x36-3350lm-4000K-Ra 1b	73 W	G13	WHITE
141407-08	CEL-F	3.70	FL 4x18-1350lm-4000K-Ra 1b	73 W	G13	WHITE
141406-09	CELF-E	7.68	FL 3x36-3350lm-4000K-Ra 1b	110 W	G13	WHITE
141407-0041	CELF-D-D	4.20	FL 4x18-1350lm-4000K-Ra 1b	69 W	G13	WHITE
141408-09	CELF-E	7.96	FL 4x36-3350lm-4000K-Ra 1b	149 W	G13	WHITE
141402-08	CEL-F	3.70	FL 1x58-5200lm-4000K-Ra 1b	56 W	G13	WHITE
141405-08	CEL-F	4.70	FL 2x58-5200lm-4000K-Ra 1b	113 W	G13	WHITE
141401-08	CEL-F	3.00	FL 1x36-3350lm-4000K-Ra 1b	37 W	G13	WHITE
141402-0041	CELF-D-D	3.78	FL 1x58-5200lm-4000K-Ra 1b	54 W	G13	WHITE
141407-12	CELF-D	4.12	FL 4x18-1350lm-4000K-Ra 1b	72 W	G13	WHITE
141408-08	CEL-F	8.00	FL 4x36-3350lm-4000K-Ra 1b	146 W	G13	WHITE

Accessories

Download

DXF 2D

- 773.dxf

Montaggi

- 77x_comfort_2008.pdf

The reported luminous flux is the flux emitted by the light source with a tolerance of ± 10% compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated

Accessories



- 2512 wire



- 2518 simple suspension

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated