


727 Comfort T8 - frosted diffuser

Housing: In pressed sheet steel.
 Optics: Diffuser in anti-dazzle lenticular plexiglass.
 Painting: Acrylic anionic electrocoating, white, UV-stabilized, anti-yellowing, upon phosphate treatment.
 Lampholder: In polycarbonate, with contacts in phosphor bronze. Socket G13.
 Electric gear: 230V/50Hz power supply. Hard wire, 0.50 sqmm cross section, and PVC-HT sheath, resistant up to 90° C, according to CEI 20-20 standards. 2P + T terminal block with maximum allowed lead cross section of 2.5 sqmm.
 Equipment: the diffuser and the frame remain attached by means of safety springs.
 Mounting: On ceiling or suspended.
 Regulations: Produced according to applicable EN60598-1 CEI 34 - 21 standards, IP20IK08 degree of protection according to EN 60529 standards. These products can be installed on normally inflammable surfaces.

Download

DXF 2D
- 727.dxf

Montaggi
- 727_8_comfort.pdf

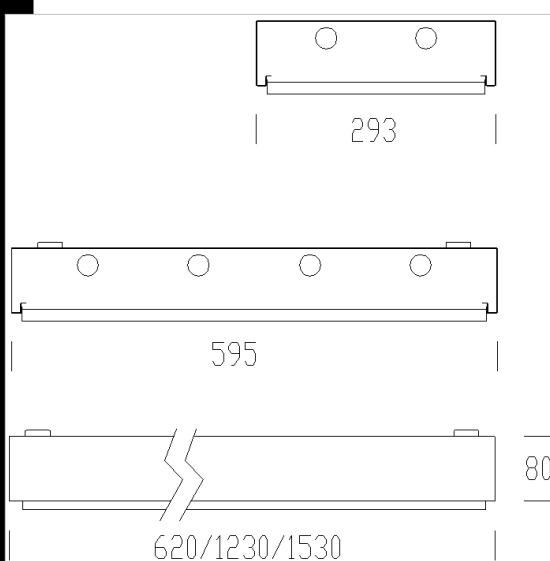

Code	Gear	Kg	Lumen-K-CRI	WTot	Base	Colour
142031-07	CNR-E	7.10	FL 2x36-3350lm-4000K-Ra 1b	89 W	G13	WHITE
142030-00	CNR	3.80	FL 2x18-1350lm-4000K-Ra 1b	42 W	G13	WHITE
142031-00	CNR	6.50	FL 2x36-3350lm-4000K-Ra 1b	86 W	G13	WHITE
142033-07	CNR-E	6.80	FL 4x18-1350lm-4000K-Ra 1b	87 W	G13	WHITE
142032-00	CNR	8.14	FL 2x58-5200lm-4000K-Ra 1b	134 W	G13	WHITE
142034-51	CEL-DH	11.20	FL 4x36-3350lm-4000K-Ra 1b	142 W	G13	WHITE
142034-07	CNR-E	11.80	FL 4x36-3350lm-4000K-Ra 1b	175 W	G13	WHITE
142033-00	CNR	6.30	FL 4x18-1350lm-4000K-Ra 1b	84 W	G13	WHITE
142030-08	CEL	3.02	FL 2x18-1350lm-4000K-Ra 1b	38 W	G13	WHITE
142034-00	CNR	11.20	FL 4x36-3350lm-4000K-Ra 1b	172 W	G13	WHITE
142031-08	CEL	6.54	FL 2x36-3350lm-4000K-Ra 1b	70 W	G13	WHITE
142030-07	CNR-E	4.30	FL 2x18-1350lm-4000K-Ra 1b	45 W	G13	WHITE
142032-08	CEL	6.49	FL 2x58-5200lm-4000K-Ra 1b	113 W	G13	WHITE
142031-51	CEL-DH	6.54	FL 2x36-3350lm-4000K-Ra 1b	71 W	G13	WHITE
142033-51	CEL-DH	5.14	FL 4x18-1350lm-4000K-Ra 1b	72 W	G13	WHITE
142032-07	CNR-E	8.54	FL 2x58-5200lm-4000K-Ra 1b	137 W	G13	WHITE
142034-08	CEL	11.20	FL 4x36-3350lm-4000K-Ra 1b	146 W	G13	WHITE
142032-51	CEL-DH	6.49	FL 2x58-5200lm-4000K-Ra 1b	108 W	G13	WHITE
142033-08	CEL	5.18	FL 4x18-1350lm-4000K-Ra 1b	73 W	G13	WHITE

Accessories



- 2512 wire



- 2518 simple suspension

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated