


727 Comfort T5 - frosted diffuser

Housing: In pressed sheet steel.
 Optics: Diffuser in anti-dazzle lenticular plexiglass.
 Painting: Acrylic anionic electrocoating, white, UV-stabilized, anti-yellowing, upon phosphate treatment.
 Lampholder: In polycarbonate, with contacts in phosphor bronze. Socket G5.
 Electric gear: 230V/50Hz power supply. Hard wire, 0.50 sqmm cross section, and PVC-HT sheath, resistant up to 90° C, according to CEI 20-20 standards. 2P + T terminal block with maximum allowed lead cross section of 2.5 sqmm.
 Equipment: the diffuser and the frame remain attached by means of safety springs.
 Mounting: On ceiling or suspended.
 Regulations: Produced according to applicable EN60598-1 CEI 34 - 21 standards, IP20IK08 degree of protection according to EN 60529 standards. These products can be installed on normally inflammable surfaces.

Download

DXF 2D
 - 727.dxf

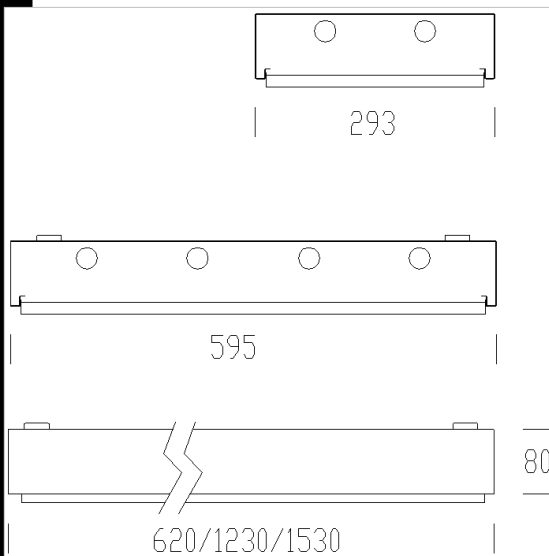

Code	Gear	Kg	Lumen-K-CRI	WTot	Base	Colour
142035-00	CELL	3.19	FL 2x14-1250lm-4000K-Ra 1b	31 W	G5	WHITE
142035-09	CELL-E	3.73	FL 2x14-1250lm-4000K-Ra 1b	34 W	G5	WHITE
142037-09	CELL-E	7.33	FL 2x49-4350lm-4000K-Ra 1b	109 W	G5	WHITE
142037-00	CELL	6.51	FL 2x49-4350lm-4000K-Ra 1b	105 W	G5	WHITE
142036-00	CELL	5.45	FL 2x28-2650lm-4000K-Ra 1b	60 W	G5	WHITE
142038-09	CNR-L	5.42	FL 4x14-1250lm-4000K-Ra 1b	69 W	G5	WHITE
142038-00	CELL	5.18	FL 4x14-1250lm-4000K-Ra 1b	66 W	G5	WHITE
142036-09	CELL-E	6.03	FL 2x28-2650lm-4000K-Ra 1b	64 W	G5	WHITE
142039-09	CELL-E	10.22	FL 4x28-2650lm-4000K-Ra 1b	124 W	G5	WHITE
142039-00	CELL	9.24	FL 4x28-2650lm-4000K-Ra 1b	120 W	G5	WHITE

The reported luminous flux is the flux emitted by the light source with a tolerance of ± 10% compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated