



## 708 Gabbiano - square edge

Housing: In sheet steel.

Reflector: in anti-glare matt white aluminium.

Diffuser: protruding hemisphere in micro-punched sheet steel, with end caps in polycarbonate and anti-dazzle opal diffuser.

Painting: white acrylic powder coating, UV-stabilized, anti-yellowing, upon phosphate treatment.

Lampholder: In polycarbonate, with contacts in phosphor bronze. Sockets 2G11; G5.


Electric gear: 230V/50Hz power supply. Hard wire, 0.50 sqmm cross section and PVC-HT sheath, resistant up to 90°C, according to CEI 20-20 standards. 2P + T terminal block, with maximum allowed lead cross section of 2.5 sqmm.

Equipment: 6.3 A fuse. Washers to fit on ceiling.

Mounting: Ceiling or suspension.

Regulations: Produced according to applicable EN60598-1 CEI 34-21 standards, IP40IK07 degree of protection according to EN 60529 standards. This product can be installed on normally inflammable surfaces.

Emergency version: In the event of a blackout, one lamp connected to the emergency circuit remains on (maintained version), thus avoiding the inconvenience usually caused by sudden power failure. Its emergency run time is 60 minutes. When power supply is restored, the battery recharges automatically.

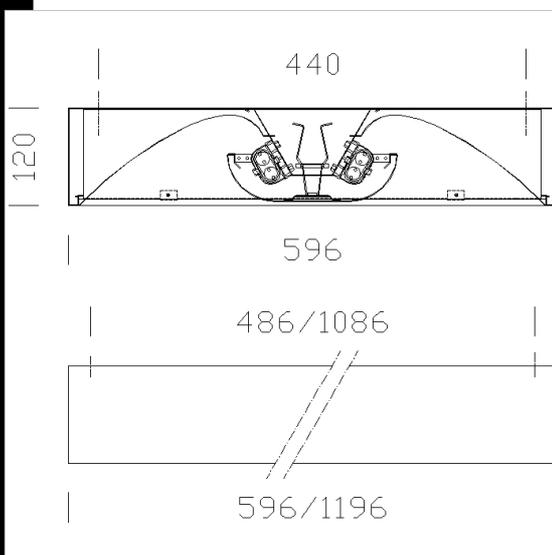

### Download

DXF 2D

- 708.dxf

### Montaggi

- mor\_fus.dxf

- ap\_ot.dxf

- int\_f\_pl.dxf

- 708\_309\_gabbiano.pdf

- 708\_a\_1.dxf

- tassello.dxf

Code	Gear	Kg	Lumen-K-CRI	WTot	Base	Colour
143024-00	CELL-F	6.50	FL 2x54-4460lm-4000K-Ra 1b	120 W	G5	WHITE
143021-07	CELLF-E	7.69	FLC 2x55L-4800lm-4000K-Ra 1b	101 W	2G11	WHITE
143021-00	CELL-F	7.21	FLC 2x55L-4800lm-4000K-Ra 1b	98 W	2G11	WHITE
143024-07	CELLF-E	6.90	FL 2x54-4460lm-4000K-Ra 1b	123 W	G5	WHITE
143020-08	CELL-F	8.11	FLC 2x36L-2900lm-4000K-Ra 1b	73 W	2G11	WHITE
143020-09	CELLF-E	8.40	FLC 2x36L-2900lm-4000K-Ra 1b	77 W	2G11	WHITE

The reported luminous flux is the flux emitted by the light source with a tolerance of  $\pm 10\%$  compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated