


708 Gabbiano

Housing: made of sheet steel. Reflector: white aluminium. Diffuser: semi-sphere in micro-perforated sheet metal. Supplied without brackets: when not contact mounted, use brackets acc. 900. Luminous flux maintenance 80% 50.000h (L80B20) Photobiological safety class: exempt group.



Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour
143025-00	CLD	7,17	LED-2975lm-4000K-CRI>80	55 W	WHITE

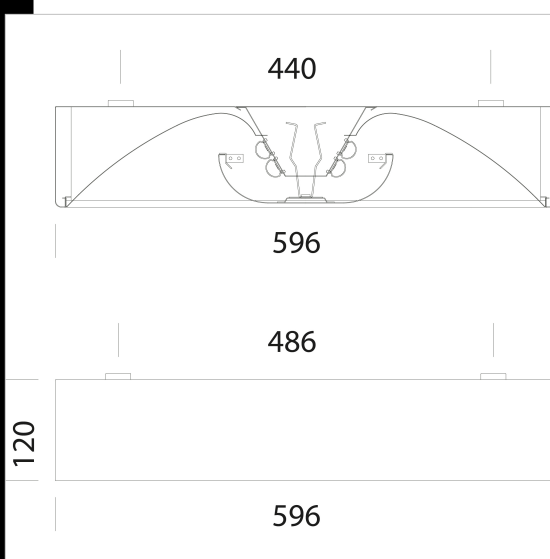

Download

DXF 2D
- 708v.dxf

Montaggi
- gabbiano 09-20.pdf

The reported luminous flux is the flux emitted by the light source with a tolerance of ± 10% compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated