

750 Minicomfort T5 high-gloss 99.99

Housing: In sheet steel.
Optics: Dark light double parabolic louvres, in high-gloss plated aluminium 99.99. Anti-dazzle and anti-iridescence, very low luminance. PVD treatment to increase light efficiency.

Painting: with polyester powder, UV-stabilized.

Lampholder: In polycarbonate, with contacts in phosphor bronze. Socket G5.
Electric gear: 230V/50Hz power supply. Hard wire, 0.50 sq mm cross section and PVC-HT sheath resistant up to 90°, according to CEI 20-20 standards.
2P+T terminal block with maximum allowed lead cross section of 2.5 sq mm.
Standard supply: Snap fastening optics, which remain attached by safety cords.

Mounting: Ceiling or suspension.

Regulations: Produced according to applicable EN60598-1 CEI 34 - 21 standards, IP20IK07 degree of protection according to EN 60529 standards. They have obtained the ENEC European Certificate of Conformity. These products can be installed on normally inflammable surfaces.

Emergency light version: in maintained version. In the event of a "black out", one single lamp connected to the back-up circuit stays on. Run time 60 minutes

THE NEW TL5 ECO MASTER LAMP HAS THE FOLLOWING ADVANTAGES:

Instant replacement of standard TL5 14W lamps.

10% energy saving.

Same luminous flux of Master TL5 14W lamps.

Good colour rendering (Ra>80).


Limited mercury levels: 1.4 mg.

INSTANT SAVING:

SAVING is possible

by replacing old ceiling light fixtures 60 x 60 with new luminaires equipped with

FL 3/4x14 MASTER TL5 HE ECO lamps!

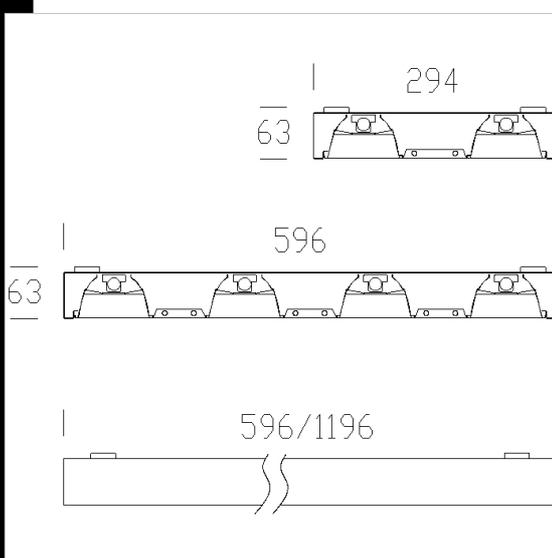

Download

DXF 2D

- 750.dxf

Montaggi

- 750_minicomfort.pdf

Code	Gear	Kg	Lumen-K-CRI	WTot	Base	Colour
143501-12	CELL-D	4.75	FL 4x14-1250lm-4000K-Ra 1b	66 W	G5	WHITE
143500-00	CELL	2.60	FL 2x14-1250lm-4000K-Ra 1b	31 W	G5	WHITE
143501-07	CELL-E	5.50	FL 4x14-1250lm-4000K-Ra 1b	69 W	G5	WHITE
143502-07	CELL-E	5.40	FL 2x28-2650lm-4000K-Ra 1b	64 W	G5	WHITE
143503-00	CNR-L	8.70	FL 4x28-2650lm-4000K-Ra 1b	120 W	G5	WHITE
143504-07	CELL-E	6.40	FL 2x49-4350lm-4000K-Ra 1b	109 W	G5	WHITE
143502-12	CELL-D	4.63	FL 2x28-2650lm-4000K-Ra 1b	60 W	G5	WHITE
143503-12	CELL-D	8.70	FL 4x28-2650lm-4000K-Ra 1b	120 W	G5	WHITE
143504-12	CELL-D	5.47	FL 2x49-4350lm-4000K-Ra 1b	106 W	G5	WHITE
143504-00	CELL	5.80	FL 2x49-4350lm-4000K-Ra 1b	105 W	G5	WHITE
143501-00	CNR-L	4.90	FL 4x14-1250lm-4000K-Ra 1b	66 W	G5	WHITE
143503-07	CELL-E	9.30	FL 4x28-2650lm-4000K-Ra 1b	124 W	G5	WHITE
143502-00	CELL	4.80	FL 2x28-2650lm-4000K-Ra 1b	60 W	G5	WHITE

Accessories



- 2512 wire



- 2518 simple suspension

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated