



2233 Giano 2 T5 - bilamp

Housing: Extruded aluminium with die-cast end caps.
Optic unit: Longitudinal and transversal double parabolic dark-light louvres built from 99.99 high-gloss, anti-glare, anti-iridescence, very low luminance aluminium.

Coating: Metallic silver or polished white polyester resin powder coating, resistant to corrosion and to saline environments

Lampholder: Polycarbonate with phosphorous bronze contacts.

Electric gear: 230V/50Hz (CNR)-230V240-50/60(CELL) power supply.

Hard wire, cross-section 0.50 sqmm and high-temperature resistant (up to 90°C) PVC-HT sheath, in accordance with CEI 20-20 standards.

2P+T terminal block (maximum allowed lead cross-section: 2.5 sqmm).

Standard supply: The snap-on optic unit remains attached by safety cords.

Cover: Optionally, direct light only using acc. 375

Regulations: Manufactured in compliance with EN60598 - CEI 34 - 21 standards. The level of protection complies with the EN60529 standard.

Other versions: with electronic dimming ballast


Emergency version: In maintained version. In the event of a black-out a single lamp connected to the back-up circuit stays on. Run time 60 minutes.

On request: A "Main Control System" to supervise the emergency versions (see chapter).

On request: versions with 3-hour battery life.

Download

DXF 2D
- 2233.dxf

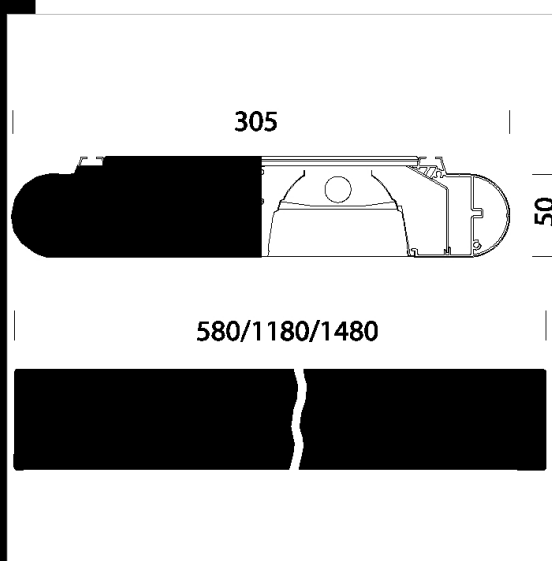

Code	Gear	Kg	Watt	Base	Lamps	Colour
143881-12	CELL-D	4,63	FL 2x28	G5	2650lm-4000K-Ra 1b	SANDBLASTED SILVER
143882-12	CELL-D	5,70	FL 2x35	G5	3350lm-4000K-Ra 1b	SANDBLASTED SILVER
143883-12	CELL-D	5,62	FL 2x49	G5	4350lm-4000K-Ra 1b	SANDBLASTED SILVER
143886-12	CELL-D	4,73	FL 2x28	G5	2650lm-4000K-Ra 1b	WHITE
143887-12	CELL-D	5,68	FL 2x35	G5	3350lm-4000K-Ra 1b	WHITE
143888-12	CELL-D	5,44	FL 2x49	G5	4350lm-4000K-Ra 1b	WHITE
143880-00	CELL	2,18	FL 2x14	G5	1250lm-4000K-Ra 1b	SANDBLASTED SILVER
143881-00	CELL	4,43	FL 2x28	G5	2650lm-4000K-Ra 1b	SANDBLASTED SILVER
143881-07	CELL-E	5,11	FL 2x28	G5	2650lm-4000K-Ra 1b	SANDBLASTED SILVER
143882-00	CELL	4,56	FL 2x35	G5	3350lm-4000K-Ra 1b	SANDBLASTED SILVER
143882-07	CELL-E	6,20	FL 2x35	G5	3350lm-4000K-Ra 1b	SANDBLASTED SILVER
143883-00	CELL	4,56	FL 2x49	G5	4350lm-4000K-Ra 1b	SANDBLASTED SILVER
143885-00	CELL	2,18	FL 2x14	G5	1250lm-4000K-Ra 1b	WHITE
143886-00	CELL	4,43	FL 2x28	G5	2650lm-4000K-Ra 1b	WHITE
143886-07	CELL-E	5,05	FL 2x28	G5	2650lm-4000K-Ra 1b	WHITE
143887-00	CELL	4,56	FL 2x35	G5	3350lm-4000K-Ra 1b	WHITE
143887-07	CELL-E	5,06	FL 2x35	G5	3350lm-4000K-Ra 1b	WHITE
143888-00	CELL	5,28	FL 2x49	G5	4350lm-4000K-Ra 1b	WHITE
143888-07	CELL-E	6,38	FL 2x49	G5	4350lm-4000K-Ra 1b	WHITE
143883-07	CELL-E	6,16	FL 2x49	G5	4350lm-4000K-Ra 1b	SANDBLASTED SILVER

Accessories



- 257 "s" module



- 255 cube with spot - CTL



- 2290 straight joint



- 254 cover



- 256 simple cube



- 2514



- 252 ceiling connection



- 2513