



Download

DXF 2D
- 3087.dxf

Montaggi
- 3084-5-6-7_top_t5.pdf



3087 Top


Housing: In extruded aluminium, with die-cast aluminium end caps. Supplied with lamella in ABS V0, frosted metal spray treatment.

Reflector: In high-gloss aluminium.

Coating: Metallic silver or polished white polyester resin powder coating, resistant to corrosion and to saline environments.

Electric gear: 230-240V/-50/60Hz power supply.

Regulations: Produced according to applicable EN60598-1CEI 34-21 standards, degree of protection according to EN 60529 standards.

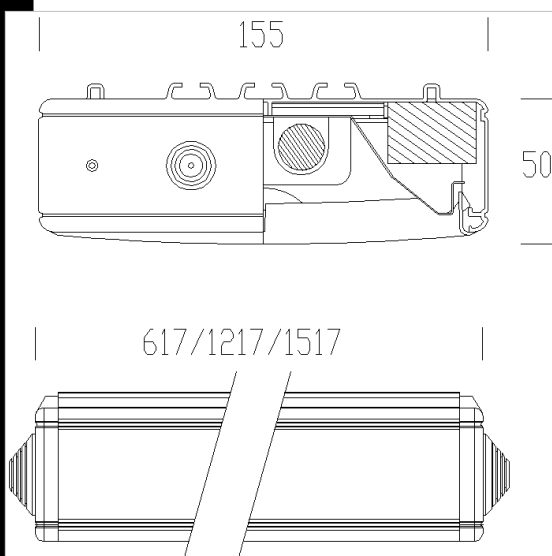

Code	Gear	Kg	Lumen-K-CRI	WTot	Base	Colour
144683-00	CELL	4.15	FL 2x49-4350lm-4000K-Ra 1b	105 W	G5	GREY
144687-00	CELL	4.15	FL 2x49-4350lm-4000K-Ra 1b	105 W	G5	WHITE
144681-07	CELL-E	4.20	FL 2x28-2650lm-4000K-Ra 1b	60 W	G5	GREY
144683-07	CELL-E	4.70	FL 2x49-4350lm-4000K-Ra 1b	105 W	G5	GREY
144685-12	CELL-D	3.54	FL 2x28-2650lm-4000K-Ra 1b	64 W	G5	WHITE
144687-07	CELL-E	4.70	FL 2x49-4350lm-4000K-Ra 1b	105 W	G5	WHITE
144683-12	CELL-D	4.23	FL 2x49-4350lm-4000K-Ra 1b	106 W	G5	GREY
144680-00	CELL	2.06	FL 2x14-1250lm-4000K-Ra 1b	31 W	G5	GREY
144681-00	CELL	3.70	FL 2x28-2650lm-4000K-Ra 1b	60 W	G5	GREY
144685-00	CELL	3.50	FL 2x28-2650lm-4000K-Ra 1b	60 W	G5	WHITE
144685-07	CELL-E	4.20	FL 2x28-2650lm-4000K-Ra 1b	60 W	G5	GREY9007/GRAF
144684-00	CELL	2.06	FL 2x14-1250lm-4000K-Ra 1b	31 W	G5	WHITE
144687-12	CELL-D	4.27	FL 2x49-4350lm-4000K-Ra 1b	106 W	G5	WHITE
144681-12	CELL-D	3.50	FL 2x28-2650lm-4000K-Ra 1b	64 W	G5	GREY

Accessories



- 2021end plug



- 2053 cross joint



- 2051 angle joint



- 2059 two-lamp cap-joint



- 2018 universal joint



- 2017ceiling connection



- 2058 Powered suspension



- 2057 Suspension



- 3084 S module



- 2292 connecting bracket



- Ø 10 rod - suspension of joint

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated