

### 3084 Top

Housing: In extruded aluminium, with die-cast aluminium end caps and clear Plexiglas screen with tiny grooves on the inside, smooth on the outside, dust-proof.

Reflector: In high-gloss aluminium.

Coating: Metallic silver or polished white polyester resin powder coating, resistant to corrosion and to saline environments.


Electric gear: 230-240V/-50/60Hz power supply.

Regulations: Produced according to applicable EN60598-1CEI 34-21 standards, degree of protection according to EN 60529 standards.

#### Download

DXF 2D  
- 3084.dxf

Montaggi  
- 3084-5-6-7\_top\_15.pdf

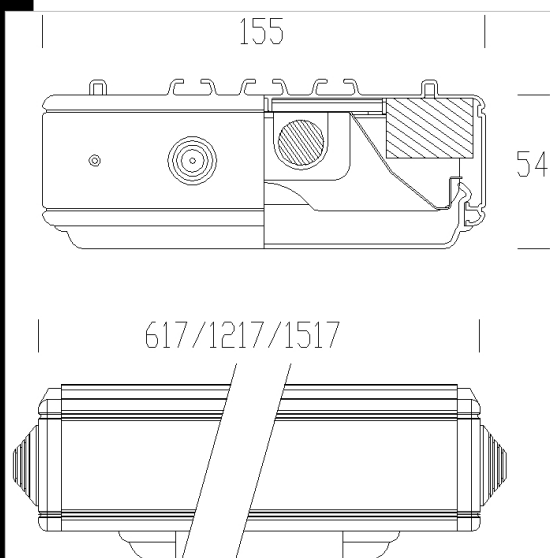

Code	Gear	Kg	Watt	Base	Lamps	Colour
144691-00	CELL	3,38	FL 1x28	G5	2650lm-4000K-Ra 1b	SANDBLASTED SILVER
144695-00	CELL	3,38	FL 1x28	G5	2650lm-4000K-Ra 1b	WHITE
144691-12	CELL-D	3,38	FL 1x28	G5	2650lm-4000K-Ra 1b	SANDBLASTED SILVER
144693-12	CELL-D	4,15	FL 1x49	G5	4350lm-4000K-Ra 1b	SANDBLASTED SILVER
144695-12	CELL-D	3,38	FL 1x28	G5	2650lm-4000K-Ra 1b	WHITE
144697-12	CELL-D	4,15	FL 1x49	G5	4350lm-4000K-Ra 1b	WHITE
144693-00	CELL	4,15	FL 1x49	G5	4350lm-4000K-Ra 1b	SANDBLASTED SILVER
144697-00	CELL	4,15	FL 1x49	G5	4350lm-4000K-Ra 1b	WHITE
144691-07	CELL-E	4,00	FL 1x28	G5	2650lm-4000K-Ra 1b	SANDBLASTED SILVER
144695-07	CELL-E	4,00	FL 1x28	G5	2650lm-4000K-Ra 1b	WHITE
144693-07	CELL-E	4,70	FL 1x49	G5	4350lm-4000K-Ra 1b	SANDBLASTED SILVER
144690-00	CELL	2,10	FL 1x14	G5	1250lm-4000K-Ra 1b	SANDBLASTED SILVER
144597-07	CELL-E	0,00	FL 1x49	G5	4350lm-4000K-Ra 1b	WHITE
144694-00	CELL	2,10	FL 1x14	G5	1250lm-4000K-Ra 1b	WHITE

#### Accessories

