




3884 Channel 2 T5 - bilamp

Housing: Extruded aluminium with die-cast end caps.
 Optic unit: Longitudinal and transversal double parabolic dark-light louvres built from 99.99 high-gloss, anti-glare, anti-iridescence, very low luminance aluminium.
 Coating: Metallic silver or polished white polyester resin powder coating, resistant to corrosion and to saline environments
 Lampholder: Polycarbonate with phosphorous bronze contacts.
 Electric gear: 230V/50Hz (CNR)-230V240-50/60(CELL) power supply.
 Hard wire, cross-section 0.50 sqmm and high-temperature resistant (up to 90°C) PVC-HT sheath, in accordance with CEI 20-20 standards.
 2P+T terminal block (maximum allowed lead cross-section: 2.5 sqmm).
 Standard supply: The snap-on optic unit remains attached by safety cords.
 Cover: Optionally, direct light only using acc. 375
 Regulations: Manufactured in compliance with EN60598 - CEI 34 - 21 standards. The level of protection complies with the EN60529 standard.
 Other versions: with electronic dimming ballast
 Emergency version: In maintained version. In the event of a black-out a single lamp connected to the back-up circuit stays on. Run time 60 minutes.
 On request: A "Main Control System" to supervise the emergency versions (see chapter).
 On request: versions with 3-hour battery life.

Download

- DXF 2D
- 3884.dxf
- 3DS
- disano_3884_channel_1480.3ds
- 3DM
- disano_3884_channel_1480.3dm

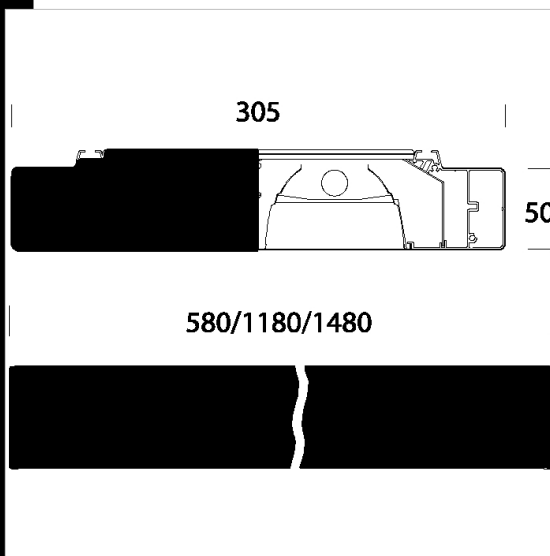

Code	Gear	Kg	Watt	Base	Lamps	Colour
145055-00	CELL	2,69	FL 2x14	G5	1250lm-4000K-Ra 1b	WHITE
145051-07	CELL-E	5,22	FL 2x28	G5	2650lm-4000K-Ra 1b	SANDBLASTED SILVER
145053-12	CELL-D	5,72	FL 2x49	G5	4350lm-4000K-Ra 1b	SANDBLASTED SILVER
145057-12	CELL-D	5,70	FL 2x35	G5	3350lm-4000K-Ra 1b	WHITE
145051-00	CELL	4,47	FL 2x28	G5	2650lm-4000K-Ra 1b	SANDBLASTED SILVER
145053-07	CELL-E	6,14	FL 2x49	G5	4350lm-4000K-Ra 1b	SANDBLASTED SILVER
145051-12	CELL-D	4,79	FL 2x28	G5	2650lm-4000K-Ra 1b	SANDBLASTED SILVER
145057-07	CELL-E	6,24	FL 2x35	G5	3350lm-4000K-Ra 1b	WHITE
145058-00	CELL	5,30	FL 2x49	G5	4350lm-4000K-Ra 1b	WHITE
145052-12	CELL-D	5,64	FL 2x35	G5	3350lm-4000K-Ra 1b	SANDBLASTED SILVER
145056-07	CELL-E	4,12	FL 2x28	G5	2650lm-4000K-Ra 1b	WHITE
145052-00	CELL	5,34	FL 2x35	G5	3350lm-4000K-Ra 1b	SANDBLASTED SILVER
145052-07	CELL-E	6,22	FL 2x35	G5	3350lm-4000K-Ra 1b	SANDBLASTED SILVER
145050-00	CELL	2,65	FL 2x14	G5	1250lm-4000K-Ra 1b	SANDBLASTED SILVER
145053-00	CELL	5,34	FL 2x49	G5	4350lm-4000K-Ra 1b	SANDBLASTED SILVER
145058-07	CELL-E	6,34	FL 2x49	G5	4350lm-4000K-Ra 1b	WHITE
145056-12	CELL-D	4,69	FL 2x28	G5	2650lm-4000K-Ra 1b	WHITE
145056-00	CELL	4,55	FL 2x28	G5	2650lm-4000K-Ra 1b	WHITE
145057-00	CELL	5,00	FL 2x35	G5	3350lm-4000K-Ra 1b	WHITE
145058-12	CELL-D	5,64	FL 2x49	G5	4350lm-4000K-Ra 1b	WHITE

Accessories



- 254 cover



- 2514