


3873 Channel 1 T5


Housing: Extruded aluminium with die-cast end caps.
 Optic unit: Longitudinal and transversal double parabolic dark-light louvres built from 99.99 high-gloss, anti-glare, anti-iridescence, very low luminance aluminium.
 Coating: Metallic silver or polished white polyester resin powder coating, resistant to corrosion and to saline environments
 Lampholder: Polycarbonate with phosphorous bronze contacts.
 Electric gear: 230V/50Hz (CNR)-230V240-50/60(CELL) power supply.
 Hard wire, cross-section 0.50 sqmm and high-temperature resistant (up to 90°C) PVC-HT sheath, in accordance with CEI 20-20 standards.
 2P+T terminal block (maximum allowed lead cross-section: 2.5 sqmm).
 Standard supply: The snap-on optic unit remains attached by safety cords.
 Cover: Optionally, direct light only using acc. 375
 Regulations: Manufactured in compliance with EN60598 - CEI 34 - 21 standards. The level of protection complies with the EN60529 standard.
 Other versions: with electronic dimming ballast
 Emergency version: In maintained version. In the event of a black-out a single lamp connected to the back-up circuit stays on. Run time 60 minutes.
 On request: A "Main Control System" to supervise the emergency versions (see chapter).
 On request: versions with 3-hour battery life.

Download
 DXF 2D
 - 3873-74.dxf
 3DS
 - disano_3873_channel_1480.3ds
 3DM
 - disano_3873_channel_1480.3dm
 Montaggi
 - 3873_mont.dxf

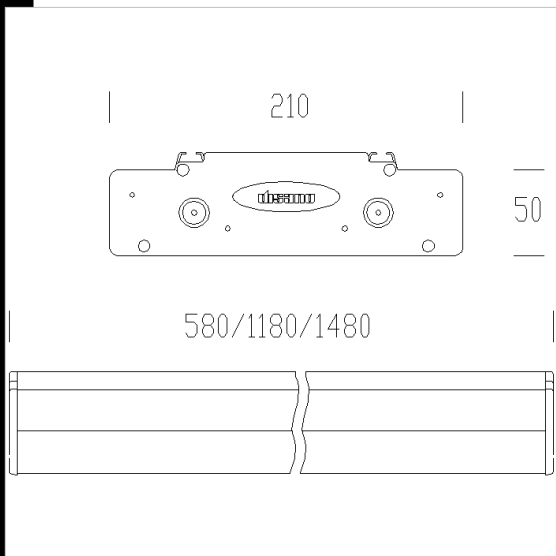

Code	Gear	Kg	Watt	Base	Lamps	Colour
145065-07	CELL-E	4,10	FL 1x28	G5	2650lm-4000K-Ra 1b	WHITE
145061-12	CELL-D	3,82	FL 1x28	G5	2650lm-4000K-Ra 1b	SANDBLASTED SILVER
145062-12	CELL-D	4,20	FL 1x35	G5	3350lm-4000K-Ra 1b	SANDBLASTED SILVER
145063-12	CELL-D	4,42	FL 1x49	G5	4350lm-4000K-Ra 1b	SANDBLASTED SILVER
145065-12	CELL-D	3,75	FL 1x28	G5	2650lm-4000K-Ra 1b	WHITE
145066-12	CELL-D	4,52	FL 1x35	G5	3350lm-4000K-Ra 1b	WHITE
145067-12	CELL-D	4,46	FL 1x49	G5	4350lm-4000K-Ra 1b	WHITE
145061-07	CELL-E	4,10	FL 1x28	G5	2650lm-4000K-Ra 1b	SANDBLASTED SILVER
145066-00	CELL	4,20	FL 1x35	G5	3350lm-4000K-Ra 1b	WHITE
145062-07	CELL-E	4,90	FL 1x35	G5	3350lm-4000K-Ra 1b	SANDBLASTED SILVER
145060-00	CELL	2,20	FL 1x14	G5	1250lm-4000K-Ra 1b	SANDBLASTED SILVER
145066-07	CELL-E	4,90	FL 1x35	G5	3350lm-4000K-Ra 1b	WHITE
145063-07	CELL-E	4,90	FL 1x49	G5	4350lm-4000K-Ra 1b	SANDBLASTED SILVER
145061-00	CELL	3,50	FL 1x28	G5	2650lm-4000K-Ra 1b	SANDBLASTED SILVER
145064-00	CELL	2,20	FL 1x14	G5	1250lm-4000K-Ra 1b	WHITE
145067-00	CELL	4,20	FL 1x49	G5	4350lm-4000K-Ra 1b	WHITE
145062-00	CELL	4,20	FL 1x35	G5	3350lm-4000K-Ra 1b	SANDBLASTED SILVER
145065-00	CELL	3,50	FL 1x28	G5	2650lm-4000K-Ra 1b	WHITE
145063-00	CELL	4,20	FL 1x49	G5	4350lm-4000K-Ra 1b	SANDBLASTED SILVER
145067-07	CELL-E	4,90	FL 1x49	G5	4350lm-4000K-Ra 1b	WHITE

Accessories

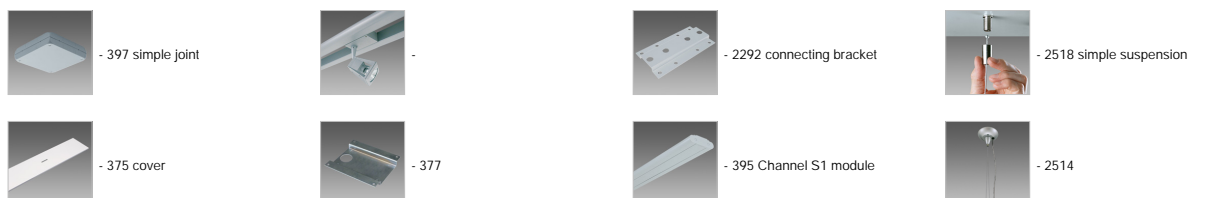

Accessories



- 376 ceiling mount



- 2513