




### 3875 Channel - cube with projector

Housing: Made of die-cast aluminium. with adjustable floodlight aluminium.  
 Made of die-cast aluminium. For "L", "T" or "X" complete with spot  
 Regulations: Produced according to applicable EN60598-1CEI 34-21 standards, degree of protection according to EN 60529 standards.

**Download**

- DXF 2D  
- 3875.dxf
- 3DS  
- disano\_3875\_channel.3ds
- 3DM  
- disano\_3875\_channel.3dm

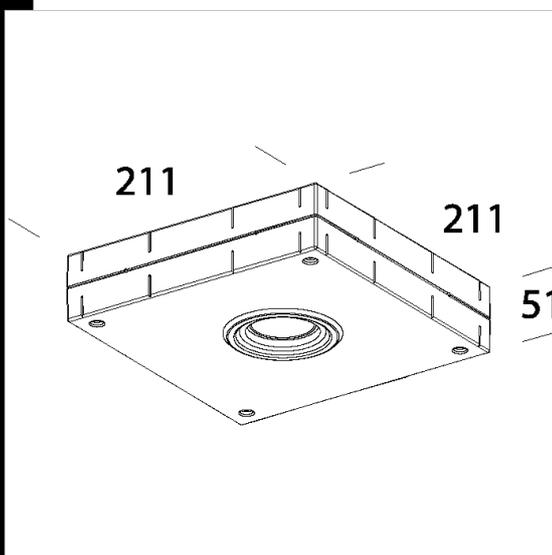

Code	Gear	Kg	Lumen-K-CRI	WTot	Base	Colour
145105-00	CTL	1.26	DICR 35 IRC-4100cd-3000K-	0 W	GU5.3	WHITE
145104-00	CNR-L	1.26	DICR 35 IRC-4100cd-3000K-	0 W	GU5.3	GREY
145107-00	CLD CELL	1.26	LED---	4 W		WHITE
145106-00	CLD CELL	1.26	LED---	3 W		GREY

The reported luminous flux is the flux emitted by the light source with a tolerance of ± 10% compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated