



CELL-D

Download

DXF 2D
- 3621.dxf

3DS
- disano_3621_arco_1277.3ds
- disano_3621_arco_1577.3ds

3DM
- disano_3621_arco_1577.3dm
- disano_3621_arco_1277.3dm

Montaggi
- 3620_21_giunzione2.dxf
- 3620_21_giunzione5.dxf
- 3620_21_giunzione3.dxf
- 3620_21_giunzione4.dxf
- 3620_21_giunzione1.dxf
- 3620-3621.pdf



3621 Arco double bilamp

A suitable ambience is an important goal to achieve in business meeting environments: light is a key element to help achieve it. Arco is a modular system supplying direct, indirect light or both, whereby you will always get the desired degree of light, depending also on sunlight.

Housing: Extruded aluminium with die-cast end caps.

Diffuser: Clear, V2 self-extinguishing, UV-stabilised polycarbonate. The smooth outside finishing facilitates cleaning, essential to ensure maximum lighting efficiency at all times.

Coating: Fluid-coated with a UV-stabilised acrylic-resin paint.

Lampholder: Polycarbonate with phosphorous bronze contacts.

Electric gear: 230-240V/-50/60Hz power supply with electronic ballast. Hard wire, cross-section 0.50 sqmm, and high-temperature resistant (up to 90°) PVC-HT sheath, in accordance with CEI 20-20 standards. 2P + T terminal block (maximum allowed lead cross-section 2.5 sqmm.)


Regulations: Manufactured in compliance with EN60598 - CEI 34 - 21 standards. The level of protection complies with the EN60529 standard. Compliant with the EN12464 standard.

Emergency version: In maintained version. In the event of a black-out a single lamp connected to the back-up circuit stays on. Run time 60 minutes.

On request: Optionally, "Main Control System" to supervise the emergency versions


Design: Lorenzo Stano

In case of mounting in a continuous line with accessory 358, the order should include fixtures with subcode -0072

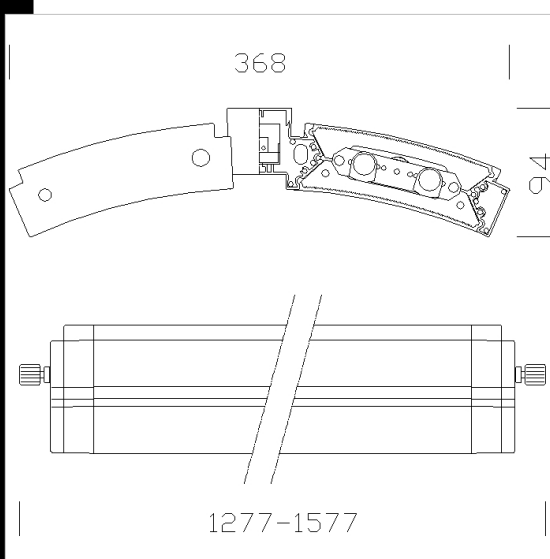

Code	Gear	Kg	Lumen-K-CRI	WTot	Base	Colour
145437-00	CELL	7.88	FL 2+2x54-4450lm-4000K-Ra 1b	240 W	G5	WHITE
145432-12	CELL-D	8.02	FL 2+2x54-4450lm-4000K-Ra 1b	230 W	G5	GREY
145432-0041	CELL-D-D	7.89	FL 2+2x54-4450lm-4000K-Ra 1b	218 W	G5	GREY9007
145432-00	CELL	7.88	FL 2+2x54-4450lm-4000K-Ra 1b	240 W	G5	GREY
145438-00	CELL	9.59	FL 2+2x80-6550lm-4000k-Ra 1b	340 W	G5	WHITE
145437-0041	CELL-D-D	8.00	FL 2+2x54-4450lm-4000K-Ra 1b	218 W	G5	WHITE
145437-12	CELL-D	7.92	FL 2+2x54-4450lm-4000K-Ra 1b	230 W	G5	WHITE
145433-00	CELL	9.59	FL 2+2x80-6550lm-4000k-Ra 1b	340 W	G5	GREY

Accessories

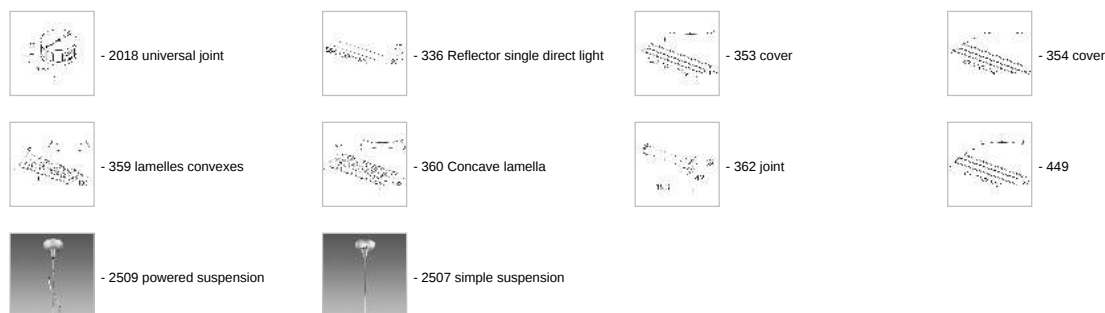

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated