



3631 Arco wall version bilamp

A suitable ambience is an important goal to achieve in business meeting environments: light is a key element to help achieve it. Arco is a modular system supplying direct, indirect light or both, whereby you will always get the desired degree of light, depending also on sunlight.

Housing: Extruded aluminium with die-cast end caps.

Diffuser: Clear, V2 self-extinguishing, UV-stabilised polycarbonate. The smooth outside finishing facilitates cleaning, essential to ensure maximum lighting efficiency at all times.

Coating: Fluid-coated with a UV-stabilised acrylic-resin paint.

Lampholder: Polycarbonate with phosphorous bronze contacts.

Electric gear: 230-240V/-50/60Hz power supply with electronic ballast. Hard wire, cross-section 0.50 sqmm, and high-temperature resistant (up to 90°) PVC-HT sheath, in accordance with CEI 20-20 standards. 2P + T terminal block (maximum allowed lead cross-section 2.5 sqmm.)

Regulations: Manufactured in compliance with EN60598 - CEI 34 - 21 standards. The level of protection complies with the EN60529 standard. Compliant with the EN12464 standard.

Emergency version: In maintained version. In the event of a black-out a single lamp connected to the back-up circuit stays on. Run time 60 minutes.

On request: Optionally, "Main Control System" to supervise the emergency versions

Design: Lorenzo Stano

In case of mounting in a continuous line with accessory 358, the order should include fixtures with subcode -0072

Download

DXF 2D

- 3631.dxf

3DS

- disano_3631_arco_1532.3ds

- disano_3631_arco_1232.3ds

- disano_3631_arco_932.3ds

3DM


- disano_3631_arco_932.3dm

- disano_3631_arco_1532.3dm

- disano_3631_arco_1232.3dm

Montaggi

- 3630-3631.pdf

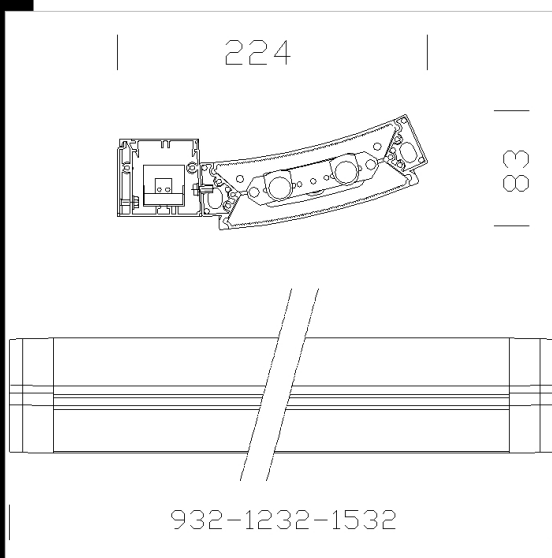

Code	Gear	Kg	Lumen-K-CRI	WTot	Base	Colour
145532-00	CELL	3.50	FL 2x39-3100lm-4000K-Ra 1b	86 W	G5	GREY
145532-12	CELL-D	3.50	FL 2x39-3200lm--	78 W	G5	GREY
145532-0041	CELL-D-D	4.00	FL 2x39-3100lm-4000K-Ra 1b	82 W	G5	GREY
145533-00	CELL	4.44	FL 2x54-4460lm-4000K-Ra 1b	120 W	G5	GREY
145533-12	CELL-D	4.62	FL 2x54-4460lm-4000K-Ra 1b	115 W	G5	GREY
145533-0041	CELL-D-D	4.66	FL 2x54-4460lm-4000K-Ra 1b	117 W	G5	GREY
145534-00	CELL	5.33	FL 2x80-6550lm-4000k-Ra 1b	156 W	G5	GREY
145534-12	CELL-D	5.27	FL 2x80-6550lm-4000k-Ra 1b	158 W	G5	GREY
145536-00	CELL	3.50	FL 2x39-3100lm-4000K-Ra 1b	86 W	G5	WHITE
145536-12	CELL-D	3.98	FL 2x39-3200lm--	78 W	G5	WHITE
145536-0041	CELL-D-D	3.92	FL 2x39-3100lm-4000K-Ra 1b	82 W	G5	WHITE
145537-00	CELL	4.44	FL 2x54-4460lm-4000K-Ra 1b	120 W	G5	WHITE
145537-12	CELL-D	4.44	FL 2x54-4460lm-4000K-Ra 1b	115 W	G5	WHITE
145537-0041	CELL-D-D	4.58	FL 2x54-4460lm-4000K-Ra 1b	110 W	G5	WHITE
145538-00	CELL	5.33	FL 2x80-6550lm-4000k-Ra 1b	156 W	G5	WHITE
145538-12	CELL-D	5.25	FL 2x80-6550lm-4000k-Ra 1b	158 W	G5	WHITE

Accessories



- 336 Reflector single direct light



- 353 cover



- 354 cover



- 359 lamelles convexes



- 360 Concave lamella



- 449

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated