



3646 Arco floor version B

A suitable ambience is an important goal to achieve in business meeting environments: light is a key element to help achieve it. Arco is a modular system supplying direct, indirect light or both, whereby you will always get the desired degree of light, depending also on sunlight.

Housing: Extruded aluminium with die-cast end caps.

Diffuser: Clear, V2 self-extinguishing, UV-stabilised polycarbonate. The smooth outside finishing facilitates cleaning, essential to ensure maximum lighting efficiency at all times.

Coating: Fluid-coated with a UV-stabilised acrylic-resin paint.

Lampholder: Polycarbonate with phosphorous bronze contacts.

Electric gear: 230-240V/-50/60Hz power supply with electronic ballast. Hard wire, cross-section 0.50 sqmm, and high-temperature resistant (up to 90°) PVC-HT sheath, in accordance with CEI 20-20 standards. 2P + T terminal block (maximum allowed lead cross-section 2.5 sqmm.)

Regulations: Manufactured in compliance with EN60598 - CEI 34 - 21 standards. The level of protection complies with the EN60529 standard. Compliant with the EN12464 standard.

Design: Lorenzo Stano

Supplied with cable with Scuko plug and floor switch.

Download

DXF 2D

- 3646.dxf

3DS


- disano_3646_arco_floorversion_b.3ds

3DM

- disano_3646_arco_floorversion_b.3dm

Montaggi

- 3645_6_arco.pdf

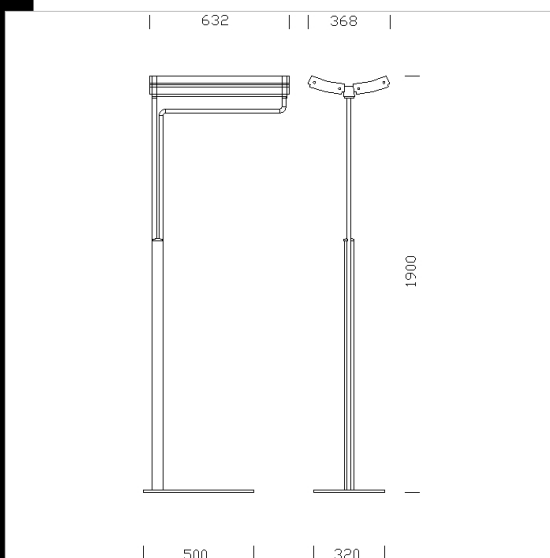

Code	Gear	Kg	Watt	Base	Lamps	Colour
145543-00	CELL	18,73	FLC 1x1 + 1x55L	2G11	4800lm-4000K-Ra 1b	WHITE
145541-00	CELL	18,73	FLC 1x1 + 1x55L	2G11	4800lm-4000K-Ra 1b	SANDBLASTED SILVER