



3843 Zenith T5 - high-gloss 99.99

Housing: Extruded aluminium with die-cast end caps.

Optic unit: Longitudinal and transversal double parabolic dark-light louvres built from 99.99 high-gloss, anti-glare, anti-iridescence, very low luminance aluminium.

Coating: Metallic silver or polished white polyester resin powder coating, resistant to corrosion and to saline environments.

Lampholder: Polycarbonate with phosphorous bronze contacts.

Electric gear: 230V240-50/60(CELL) power supply. Hard wire, cross-section 0.50 sqmm and high-temperature resistant (up to 90°C) PVC-HT sheath, in accordance with CEI 20-20 standards.

2P+T terminal block (maximum allowed lead cross-section: 2.5 sqmm).

Standard supply: The snap-on optic unit remains attached by safety cords. Quick connectors for electrical line. 3.5° protection fuse.

Cover: Optionally, direct light only using acc. 526


Regulations: Manufactured in compliance with EN60598 - CEI 34 - 21 standards. The level of protection complies with the EN60529 standard.

Emergency version: In maintained version. In the event of a black-out a single lamp connected to the back-up circuit stays on. Run time 60 minutes.

On request: A "Main Control System" to supervise the emergency versions (see chapter).

On request: versions with 3-hour battery life.

In case of mounting in a continuous line order should include fixtures with subcode -0072 except for the first of the line.

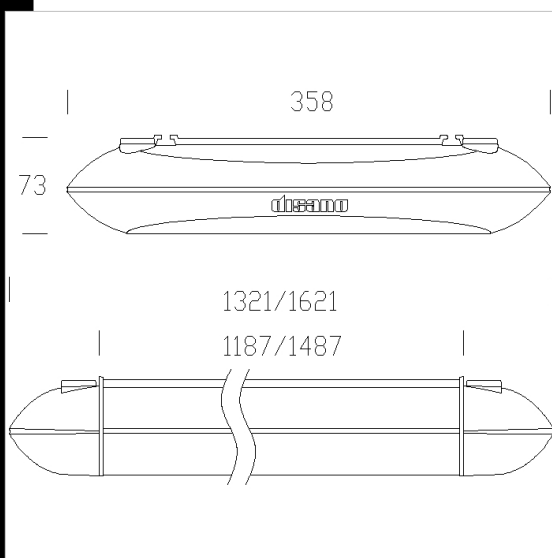

Download

DXF 2D
- 3843-45.dxf

Montaggi
- 3843-5_zenith.pdf
- zenith montaggio.dxf

Code	Gear	Kg	Watt	Base	Lamps	Colour
145630-12	CELLF-D	6,91	FL 2x28	G5	2650lm-4000K-Ra 1b	SANDBLASTED SILVER
145631-12	CELLF-D	8,30	FL 2x35	G5	3350lm-4000K-Ra 1b	SANDBLASTED SILVER
145632-12	CELLF-D	6,90	FL 2x28/54 FL 2x28	G5 G5	2650lm-4000K-Ra 1b	ANTHRACITE
145633-12	CELLF-D	6,99	FL 2x28	G5	2650lm-4000K-Ra 1b	WHITE
145634-12	CELLF-D	8,40	FL 2x35	G5	3350lm-4000K-Ra 1b	WHITE
145635-12	CELLF-D	8,44	FL 2x35	G5	3350lm-4000K-Ra 1b	ANTHRACITE
145632-00	CELL-F	6,10	FL 2x28	G5	2650lm-4000K-Ra 1b	ANTHRACITE
145630-00	CELL-F	6,10	FL 2x28	G5	2650lm-4000K-Ra 1b	SANDBLASTED SILVER
145631-07	CELLF-E	8,00	FL 2x35	G5	3350lm-4000K-Ra 1b	SANDBLASTED SILVER
145633-00	CELL-F	6,10	FL 2x28	G5	2650lm-4000K-Ra 1b	WHITE
145634-00	CELL-F	7,50	FL 2x35	G5	3350lm-4000K-Ra 1b	WHITE
145634-07	CELLF-E	8,00	FL 2x35	G5	3350lm-4000K-Ra 1b	WHITE
145635-00	CELL-F	7,50	FL 2x35	G5	3350lm-4000K-Ra 1b	ANTHRACITE
145635-07	CELLF-E	8,00	FL 2x28	G5	2650lm-4000K-Ra 1b	ANTHRACITE
145631-00	CELL-F	7,50	FL 2x35	G5	3350lm-4000K-Ra 1b	SANDBLASTED SILVER

Accessories



- 2608



- 524 end cap - Zenith



- 525 ceiling connection



- 526 Cover - Zenith



- 2607simple suspension



- 527 head for cube junction - Zenith



- 523 simple cube - Zenith