


3845 Zenith T5 - with diffuser

Housing: Extruded aluminium with die-cast end caps.
 Diffuser: Clear, V2 self-extinguishing, UV-stabilised polycarbonate. The smooth outside finishing facilitates cleaning, essential to ensure maximum lighting efficiency at all times.
 Coating: Metallic silver or polished white polyester resin powder coating, resistant to corrosion and to saline environments.
 Lampholder: Polycarbonate with phosphorous bronze contacts.
 Electric gear: 230V240-50/60(CELL) power supply with multiwatt ballast. Hard wire, cross-section 0.50 sqmm and high-temperature resistant (up to 90°C) PVC-HT sheath, in accordance with CEI 20-20 standards.
 2P+T terminal block (maximum allowed lead cross-section: 2.5 sqmm).
 Standard supply: The snap-on optic unit remains attached by safety cords.
 Quick connectors for electrical line. 3.5° protection fuse.
 Cover: Optionally, direct light only using acc. 526
 Regulations: Manufactured in compliance with EN60598 - CEI 34 - 21 standards. The level of protection complies with the EN60529 standard.
 Emergency version: In maintained version. In the event of a black-out a single lamp connected to the back-up circuit stays on. Run time 60 minutes.
 On request: A "Main Control System" to supervise the emergency versions (see chapter).
 On request: versions with 3-hour battery life.
 In case of mounting in a continuous line order should include fixtures with subcode 0072 except for the first of the line.

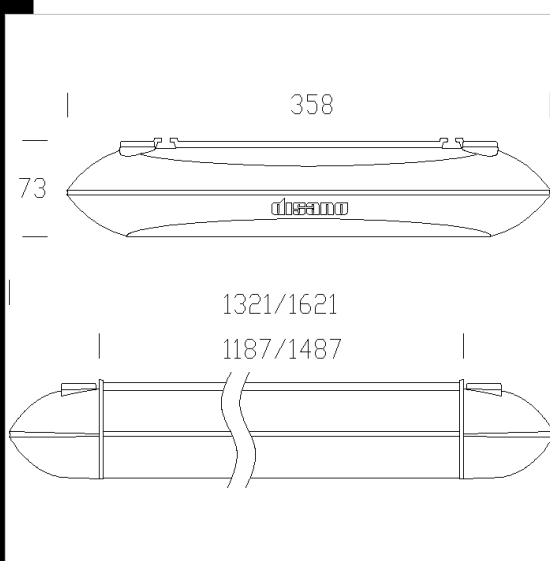

Code	Gear	Kg	Watt	Base	Lamps	Colour
145660-12	CELLF-D	6,71	FL 2x28	G5	2650lm-4000K-Ra 1b	SANDBLASTED SILVER
145661-12	CELLF-D	8,20	FL 2x35	G5	3350lm-4000K-Ra 1b	SANDBLASTED SILVER
145662-12	CELLF-D	6,79	FL 2x28	G5	2650lm-4000K-Ra 1b	ANTHRACITE
145663-12	CELLF-D	6,71	FL 2x28	G5	2650lm-4000K-Ra 1b	WHITE
145664-12	CELLF-D	7,94	FL 2x35	G5	3350lm-4000K-Ra 1b	WHITE
145665-12	CELLF-D	7,94	FL 2x35	G5	3350lm-4000K-Ra 1b	ANTHRACITE
145662-00	CELL-F	6,10	FL 2x28	G5	2650lm-4000K-Ra 1b	ANTHRACITE
145665-00	CELL-F	7,50	FL 2x35	G5	3350lm-4000K-Ra 1b	ANTHRACITE
145660-00	CELL-F	6,10	FL 2x28	G5	2650lm-4000K-Ra 1b	SANDBLASTED SILVER
145661-00	CELL-F	7,50	FL 2x35	G5	3350lm-4000K-Ra 1b	SANDBLASTED SILVER
145661-07	CELLF-E	8,00	FL 2x35	G5	3350lm-4000K-Ra 1b	SANDBLASTED SILVER
145663-00	CELL-F	6,10	FL 2x28	G5	2650lm-4000K-Ra 1b	WHITE
145664-00	CELL-F	7,50	FL 2x35	G5	3350lm-4000K-Ra 1b	WHITE
145664-07	CELLF-E	8,00	FL 2x35	G5	3350lm-4000K-Ra 1b	WHITE
145665-07	CELLF-E	8,00	FL 2x35	G5	3350lm-4000K-Ra 1b	ANTHRACITE

Accessories



- 2608



- 524 end cap - Zenith



- 525 ceiling connection



- 526 Cover - Zenith



- 2607 simple suspension



- 527 head for cube junction - Zenith



- 523 simple cube - Zenith

Download

DXF 2D
 - 3843-45.dxf

Montaggi
 - 3843-5_zenith.pdf
 - zenith montaggio.dxf