



2100 Kendo

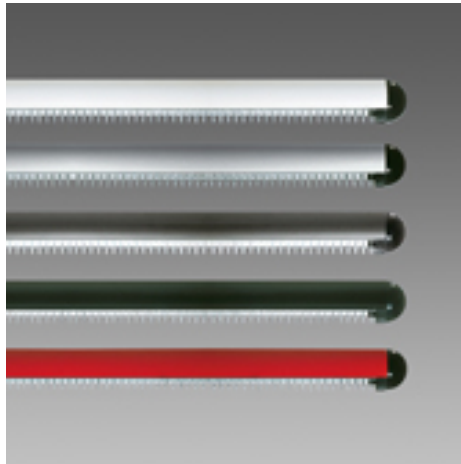

100



| Code | Gear | Kg | Colour | lamp |
|-----------|-------|------|-----------|--------------------------------|
| 146231-00 | CEL | 1.60 | white | FL 1x18-G13-1350lm-4000K-Ra 1b |
| 146234-00 | CEL | 1.60 | al. track | FL 1x18-G13-1350lm-4000K-Ra 1b |
| 146235-00 | CEL | 1.60 | black | FL 1x18-G13-1350lm-4000K-Ra 1b |
| 146236-00 | CEL | 1.60 | green | FL 1x18-G13-1350lm-4000K-Ra 1b |
| 146237-00 | CEL | 1.60 | red | FL 1x18-G13-1350lm-4000K-Ra 1b |
| 146244-08 | CEL | 1.60 | al. track | FL 1x18-G13-1350lm-4000K-Ra 1b |
| 146331-00 | CEL | 2.60 | white | FL 1x36-G13-3350lm-4000K-Ra 1b |
| 146334-00 | CEL | 2.60 | met. grey | FL 1x36-G13-3350lm-4000K-Ra 1b |
| 146335-00 | CEL | 2.60 | black | FL 1x36-G13-3350lm-4000K-Ra 1b |
| 146336-00 | CEL | 2.60 | green | FL 1x36-G13-3350lm-4000K-Ra 1b |
| 146337-00 | CEL | 2.60 | red | FL 1x36-G13-3350lm-4000K-Ra 1b |
| 146245-08 | CEL | 2.60 | al. track | FL 1x36-G13-3350lm-4000K-Ra 1b |
| 146431-00 | CEL | 3.10 | white | FL 1x58-G13-5200lm-4000K-Ra 1b |
| 146434-00 | CEL | 3.10 | met. grey | FL 1x58-G13-5200lm-4000K-Ra 1b |
| 146435-00 | CEL | 3.10 | black | FL 1x58-G13-5200lm-4000K-Ra 1b |
| 146436-00 | CEL | 3.10 | green | FL 1x58-G13-5200lm-4000K-Ra 1b |
| 146437-00 | CEL | 3.10 | red | FL 1x58-G13-5200lm-4000K-Ra 1b |
| 146246-08 | CEL | 3.10 | al. track | FL 1x58-G13-5200lm-4000K-Ra 1b |
| 146331-09 | CEL-E | 2.60 | white | FL 1x36-G13-3350lm-4000K-Ra 1b |
| 146335-09 | CEL-E | 2.60 | black | FL 1x36-G13-3350lm-4000K-Ra 1b |
| 146337-09 | CEL-E | 2.60 | red | FL 1x36-G13-3350lm-4000K-Ra 1b |

| Code | Gear | Kg | Colour | lamp |
|-----------|-------|------|-----------|--------------------------------|
| 146245-09 | CEL-E | 2.60 | al. track | FL 1x36-G13-3350lm-4000K-Ra 1b |
| 146431-09 | CEL-E | 3.10 | white | FL 1x58-G13-5200lm-4000K-Ra 1b |
| 146435-09 | CEL-E | 3.10 | black | FL 1x58-G13-5200lm-4000K-Ra 1b |
| 146437-09 | CEL-E | 3.10 | red | FL 1x58-G13-5200lm-4000K-Ra 1b |
| 146246-09 | CEL-E | 3.10 | al. track | FL 1x58-G13-5200lm-4000K-Ra 1b |

Housing: In extruded aluminium, circular section Ø 100.

Reflector: In steel pre-painted with white polyester resin, anti-yellowing, with electric gear on top.

Painting: Spray coated with a UV-stabilised acrylic water-based paint, UV-stabilized, upon chromate treatment.

Lampholder: In white polycarbonate, with contacts in phosphor bronze. Socket G13.

Electric gear: 230V/50Hz power supply. Hard wire, 0.50 sqmm cross section, and PVC-HT sheath, resistant up to 90°C, according to CEI 20-20 standards. 2P + T terminal block, with maximum allowed lead cross section of 2.5 sqmm.

Standard supply: Electric gear mounted on removable battens for easy maintenance. The reflector remains hooked to the housing by means of nylon cords.

Mounting: Suspension or ceiling mounting.

Regulations: Produced according to applicable EN60598-1 CEI 34-21 standards, IP40IK08 degree of protection according to EN 60529 standards and approved by the Italian Body for Quality Marking (IMQ).

They have obtained the ENEC European Certificate of Conformity. These products can be installed on normally inflammable surfaces.

Special electric gear: Electronic ballast for all versions, keeping the fixture length unchanged.

Emergency kit for all versions, except for 18 W version, keeping the fixture length unchanged.

Emergency light version: If a black-out occurs, lamp connected to the emergency circuit will stay on, thus avoiding the inconvenience caused by a sudden absence of all light. It has a 60-minute emergency run time. When power is restored, the battery recharges automatically.