

845 Comfort Panel LED IP65

The superior quality of LED lighting is now more accessible thanks to a benchmark product that offers, at reduced costs, the ideal light for offices, shopping malls, hotels and in general all those spaces that need constant lighting.

Comfort Panel comes in either a square or rectangular shape that can be easily installed into ceilings. It is equipped with fast connectors, avoiding the need to open the unit. Its shape guarantees uniform light distribution, while the white-light LEDs generate high light quality, ensuring the best visual comfort.

All this comes with significant energy savings

Housing: in sheet steel, contact mounting on the cross T structure.


Diffuser: in opal engineering plastic with high thermal transmittance.

Wiring: rapid wiring connection, the fixture does not need to be opened.

Luminous flux maintenance 80% 50000h (L80B20)

Photobiological safety class: exempt group

Power factor 0,95

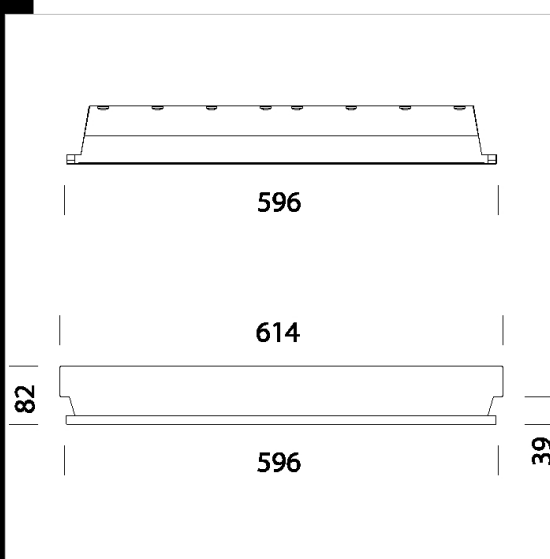


Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour
150221-00	CLD	6.48	LED-3664lm-4000K-CRI 80	35 W	WHITE
150221-12	CLD-D	6.62	LED-3664lm-4000K-CRI 80	35 W	WHITE

Accessories



- 320 steel safety cord

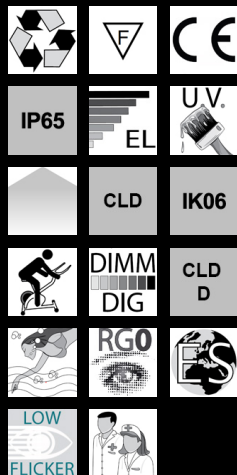

Download

DXF 2D

- 845.dxf

Montaggi

- comfort panel 07-20.pdf

BIM

- 845 Comfort Panel LED - IP65 - 20200211.zip

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated