


844 LED Panel HE - UGR<19 - DIP SWITCH

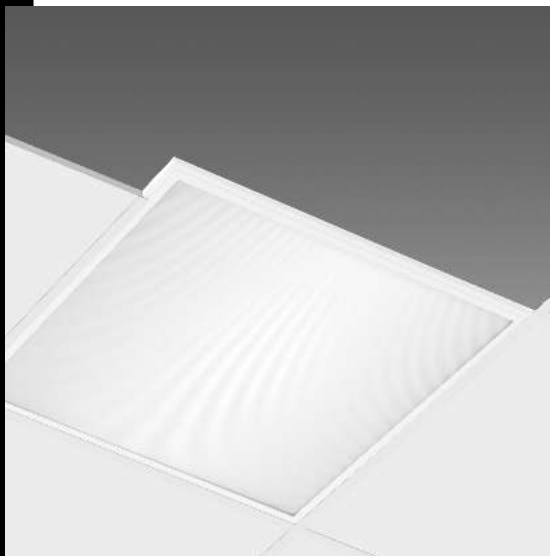

The superior quality of LED lighting is now more accessible thanks to a benchmark product that offers, at reduced costs, the ideal light for offices, shopping malls, hotels and in general all those spaces that need constant lighting. A simple solution to have the most updated technology in terms of interior lighting.

The integration of a LED source inside a lighting fixture is not always synonym with extraordinary performance. Long life and excellent light output are also guaranteed by the use of accurately tested, controlled and selected materials that can keep certain lighting and aesthetic qualities unaltered, such as lumen maintenance, perfect colour rendering, no glare and anti-yellowing properties. All this, combined with a well-known brand, will ensure reliability and efficiency over time.


However, we must not forget that the presence of a LED source is not enough to guarantee truly exceptional lighting performance levels, as well as long life and quality light output. Other equally important factors are necessary to determine true quality.

In the ours panels, a special slab is inserted between the LED source and the diffuser. This component is fundamental for ensuring the right quality and amount of light output: that is a polymer that keeps its characteristics unaltered in time and prevents the lens from yellowing, which is a phenomenon that is likely to occur in "cheaper" products that use polystyrene (PS) which is available at much lower prices. The result? Unlike PMMA slabs, the ones in PS become yellow after 6-8000 hours of operation, decreasing both the amount and the quality of the light emitted. And what's worse, even when the fixture is switched off, they can compromise the perfect integration of the white panel into the false ceiling, affecting the overall appearance of the installation. Thanks to the slab in PMMA, the ours panels is capable of taking full advantage of the lighting benefits ensured by the most advanced LED sources, keeping their unaltered over time: 80% lumen maintenance for 50000 h (L80B20), perfect colour rendering, no glare (UGR<19) and certified low flickering level. Housing and frame: housing in galvanised steel sheet, and frame in aluminium. Inner slab: in PMMA. Diffuser: in engineering plastic with high thermal transmittance.

UGR glare index: UGR<19 (in any situation). - EN 12464. Art 150211-00: not UGR<19
Power factor 0.95 Luminous flux maintenance 80% 50.000h (L80B20). Photobiological safety class: Exempt group.

DIP switch setting: the fixture comes with a dip switch driver for the setting of the output current. In this way you, can ensure the best luminous flux for any lighting design. The possibility to choose the correct drive current for LEDs will allow you to have the right power under specific design conditions. Using a lower current will improve the efficiency of fixtures and therefore increase energy savings, whilst a higher current will result in a higher light flux so that you can reduce the number of fixtures.

150225-00 DIP SWITCH I out W tot K - ølm - CRI 700 28 4000K - 3220lm - CRI80
800 32 4000K - 3680lm - CRI80 900 36 4000K - 4140lm - CRI80
150225-39 DIP SWITCH I out W tot K - ølm - CRI 700 28 3000K - 3059lm - CRI80
800 32 3000K - 3490lm - CRI80 900 36 3000K - 3900lm - CRI80

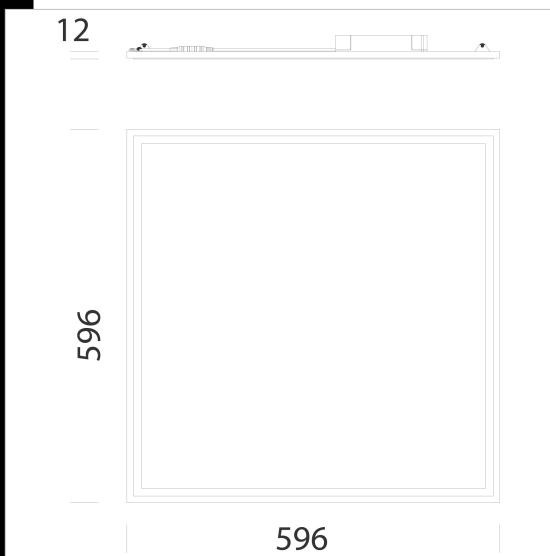

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour
150225-00	CLD	2,50	LED-3420lm-4000K-1000mA-CRI80	27 W	WHITE
150225-39	CLD	2,50	LED-4370lm-3000K-1000mA-CRI80	27 W	WHITE

Accessori



- 320 steel safety cord



- 587 Presence and light sensor



- 2520 simple suspension



- 595 frame 600x600 h45mm



- 907 Springs



- 600 EM power kit



Download

DXF 2D
- 844.dxf

Montaggi

- 595 01-20.pdf
- 600 02-20.pdf
- led panel 09-19.pdf

BIM

- 844 LED Panel HE - UGR19 - CRI80
+ Acc:595 - 20200514.zip
- 844 LED Panel - 20200211.zip

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated