


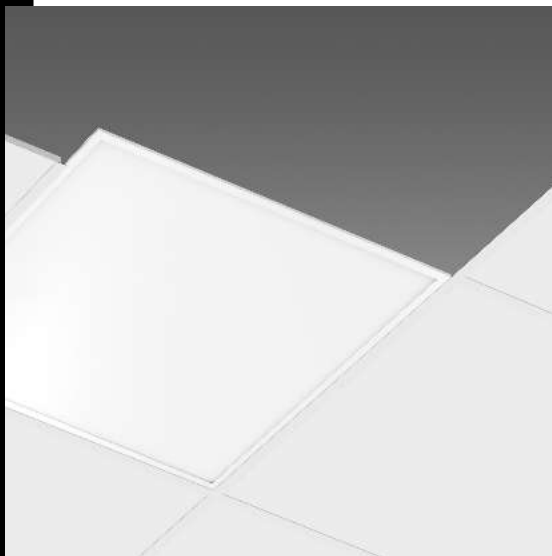

831 Rodi IP65 - UGR<22

Rodi is the new recessed LED backlighting ceiling fixture that opens up a whole different way of thinking about artificial lighting. With a very slender design and high-efficiency 4000K LED sources, Rodi offers a very bright and diffused lighting, while keeping energy consumptions extremely low and setting itself as the ideal solution for general and functional lighting applications. Housing and frame: housing in galvanised steel sheet, and frame in aluminium, contact mounting on the cross T structure. Diffuser: in opal engineering plastic with high thermal transmittance. Wiring: rapid wiring connection, the fixture does not need to be opened.

UGR glare index:


UGR<22 (in any situation). - EN 12464. LED: Luminous flux maintenance 80%; 50.000h (L80B20). Power factor 0.95. Photobiological safety class: exempt group.

Download

DXF 2D
- 832d.dxf

Montaggi
- 600 02-20.pdf
- rodi 08-20.pdf

BIM
- 831 Rodi R IP65 - UGR22 -
20210315.zip
- 831 Rodi IP65 - UGR22 -
20210315.zip

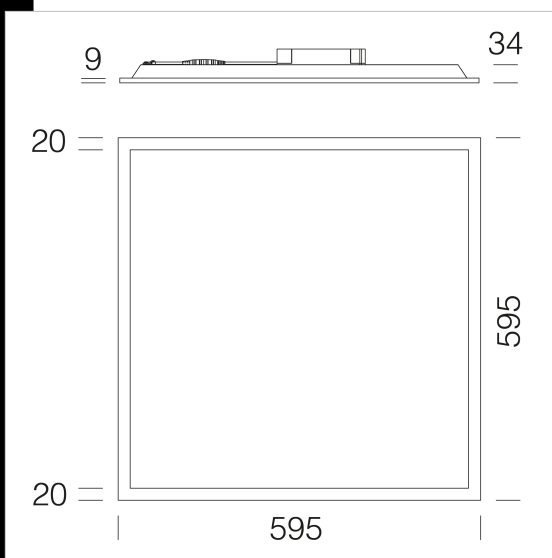

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour
150232-00002264	CLD	2,50	LED-4464lm-4000K-CRI 80	39 W	WHITE

Accessori



- 320 steel safety cord



- 2520 simple suspension



- 907 Springs



- 600 EM power kit



- 595 frame 600x600 h70mm

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated